

# Deck Lite

Cat. No. DK

[Click here for specifications on this luminaire](#)

[Return to main index](#)



The Deck Lite is designed to mount to flat surfaces e.g. wooden and concrete decks, tiled areas, brick walls, etc. Light is emitted on a horizontal plane through UV stable acrylic lens with anti-glare mesh around 360 degrees via a 5, 10 or 20 watt halogen bi-pin lamp, and does not project any vertical light due to the anti-glare hood.

## Ordering Information

### Luminaire Type


DK - Deck Lite

### Material/Finish

BK - Black  
BZ - Bronze  
GN - Green  
MS - Metallic Silver  
WH - White

### Accessories

CJK150 - Cable Joint Kit



Cop - Copper

Ordering Example: DK BK - Deck Lite in Black

CJK150 - Cable Joint Kit  
*(Accessories ordered separately)*



Patent Pending



**FACTORY:** Ph: 64-9-528 9471 Fax: 64-9-528 9361.

**USA:** Ph. 310 560 7310 Fax. 1 877 692 4589.

hunza@hunza.co.nz www.hunza.co.nz

Specifications may change without notice.

130 Felton Mathew Ave, Glen Innes, Auckland, New Zealand.

3237 Long Island St, W. Sacramento, California 95691, USA.

Manufactured in New Zealand.

© 2004 Hunza Holdings Ltd

Ver 1.2

### Luminaire Construction

CNC machined from one of the following metals:

High corrosion resistant 63.5mm (2 1/2") x 10mm (25/64") aluminium.  
End cap - solid aluminium 63.5mm (2 1/2") rod, with cromate substrate and high UV resistant polyester powder coat -

Colours Black, Bronze, Green, Metallic Silver, White.

Copper 63.5mm (2 1/2") x 10mm (13/32"). End cap - solid copper 63.5mm (2 1/2") rod.

### Hood

260mm (10 1/4") x 1.2mm (1/16") hand spun aluminium or copper.

### Mounting

Via internal flange with three bolts to wooden deck or concrete.

### Features

#### Lens:

UV stable clear acrylic with anti-glare mesh.

#### Anti Glare Hood:

Diameter 140mm (5 1/2"). No upward light or glare projected.

#### Gasket:

Silicone, iron impregnated 220c (4280f)

#### Lamp Holder:

GU4 350°c (662°f) ceramic multi contact lamp holder with 250°c (480°f) teflon cables.

#### Accessories:

Cable Joint Kit (Cat. CJK 150)  
Not approved for USA /Canada.

### Standards

IP66



UL1838

### Luminaire Weight

Alum .60kg (1lb 5oz)  
Cop 1.160kg (8lb 3oz)

### Power Supply

HUNZA® Inground or Wall Mount Transformer: not included.

### USA and Canada:

HUNZA® Wall Mount Transformer: not included.


### Lamp Type

GU4 Bi-Pin 5, 10, 20 watt lamp max.

### USA and Canada:

GU4 Bi-Pin 5, 10, 20 watt lamp max.

Deck Lite 20 watt G4 Bi-Pin lamp - Lens height 100mm (4")

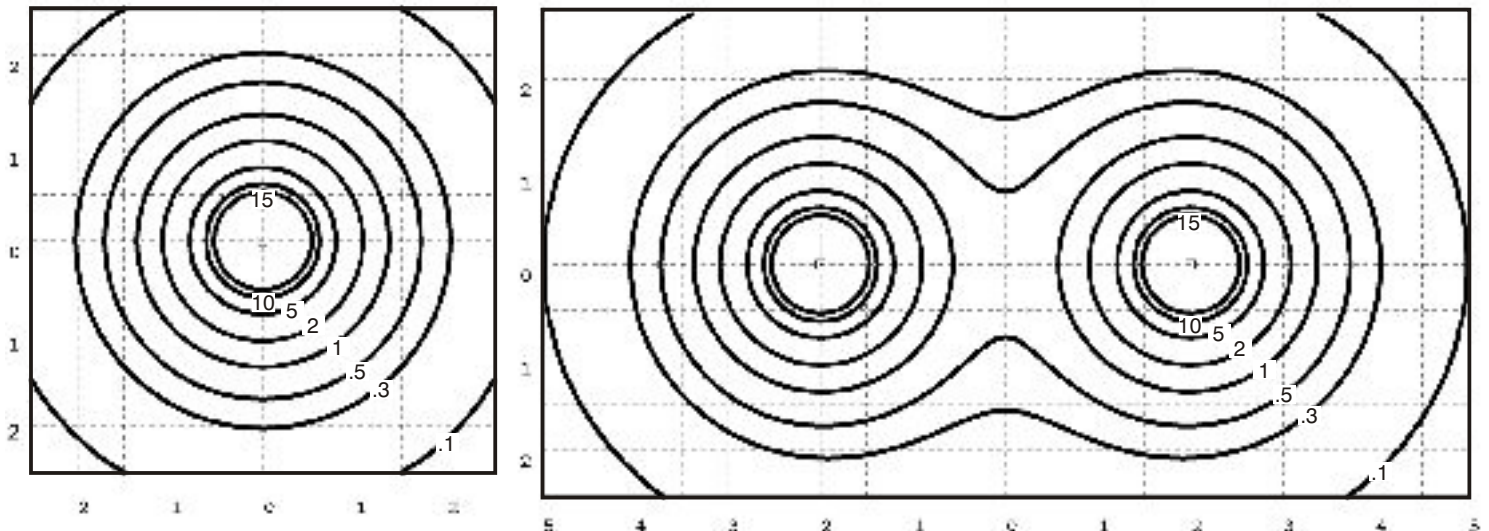

Isolux Lumens Plot - Footcandles = Isolux figures divided by 10.76



**FACTORY:** Ph: 64-9-528 9471 Fax: 64-9-528 9361.

**USA:** Ph. 310 560 7310 Fax. 1 877 692 4589.

hunza@hunza.co.nz www.hunza.co.nz

Specifications may change without notice.

130 Felton Mathew Ave, Glen Innes, Auckland, New Zealand.

3237 Long Island St, W. Sacramento, California 95691, USA.

Manufactured in New Zealand.

Ver 1.2

© 2004 Hunza Holdings Ltd