

Euro Single Pole Lite

Cat. No. ESPL
Cat. No. ESPL/R




[Click here for specifications on this luminaire](#)

[Return to main index](#)

The Euro Single Pole Lite is for situations where the luminaire needs to be discreet, the smaller sized MR11 lamp is utilised to achieve this. A single spotlight which can be aimed in any direction. This luminaire has a fully adjustable arm allowing 360 degree rotation and 0 - 90° elevation with a built in glare guard.

The Retro™, which is a mains option, avoids the need to bury a transformer. The 110/240-12 volt electronic transformer is built into the pole and is a double insulated safety isolating transformer this changes the luminaire to an IP56 rating.

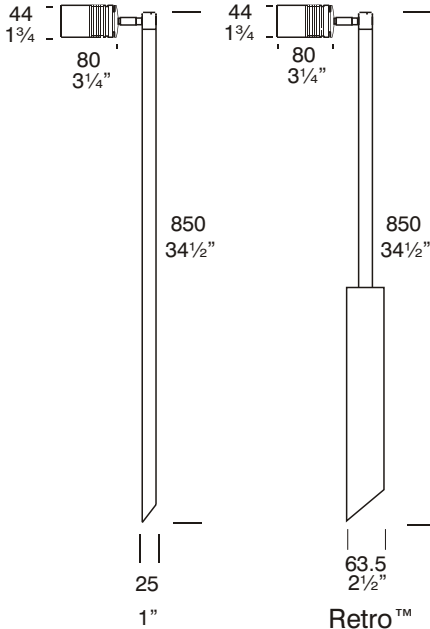

Ordering Information

Luminaire Type	Material/Finish	Accessories
ESPL - Euro Single Pole Lite	Cop - Copper SS - 316 Stainless Steel	CJK150 - CJK150 Cable Joint Kit EFL - Frost Lens LED - LED Array D/LED - LED Driver SSP/G - Hunza® Super Spike /R - Retro™ Transformer 110/240-12 volt

Ordering Example: ESPL SS - Euro Single Pole Lite in 316 Stainless Steel
ESPL/R COP - Euro Single Pole Lite Retro™ in Copper
SSP/G - Hunza® Super Spike
(Accessories ordered separately)



FACTORY: Ph: 64-9-528 9471 Fax: 64-9-528 9361.
USA: Ph. 310 560 7310 Fax. 1 877 692 4589.
hunza@hunza.co.nz www.hunza.co.nz
Specifications may change without notice.

130 Felton Mathew Ave, Glen Innes, Auckland, New Zealand.
3237 Long Island St, W. Sacramento, California 95691, USA.
Manufactured in New Zealand.

Ver 1.2

© 2004 Hunza Holdings Ltd

Luminaire Construction

CNC machined from one of the following metals:

Copper:

Body 45.4mm rod.

Pole 25.4mm (1") x 850mm (33½") tube.

316 Stainless Steel:

Body 45.4mm rod.

Pole 25.4mm (1") x 850mm (33½") tube.

Retro™:

Pole - 25.4mm (1") x 410mm (16") tube.

Transformer Pole 63.5mm (2½") x 440mm (17½").

Mounting

Pole 850mm (31½") directly mounted into the earth or for extra stability in sand or loose ground use a HUNZA® Super Spike. Retro™ set in concrete.

Features

Lens:

3mm (1/8") clear tempered shatter resistant glass with Hex Cell Louver for glare control.

Life Time Warranty.

Gaskets:

Silicone, iron impregnated 220°C (428°F).

Lamp Holder:

GU4 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) teflon cables.

Accessories:

Cable Joint Kit (Cat. CJK150). Not approved for USA/Canada.

Frosted Lens (Cat. EFL).

Hunza® Super Spike, not Retro™ option (Cat. SSP/G).

LED Array Red, Blue, White, Yellow, Green (Cat. LED). Refer sheet 8.4

LED Driver (Cat. D/LED) Refer sheet no. 8.4

Retro™ transformer 110/240-12 volt (Cat. /R) IP56.

Swivel:

Copper luminaires - 360° rotation and 0 - 90° elevation, solid brass with anti rust spring.

Stainless Steel luminaires - 360° rotation and 0 - 90° elevation, full stainless steel construction.

Standards

IP56 / IP66



Luminaire Weight

12 volt

Cop 1.355kg (2lb 15oz)
SS 1.200kg (2lb 10oz)

RETRO™ IP56

Cop 2.535kg (5lb 9oz)
SS 2.400kg (5lb 4oz)

Power Supply

HUNZA® Inground or Wall Mount Transformer: not included.

LED - Refer sheet no. 8.4

USA and Canada

HUNZA® Wall Mount Transformer: not included.

LED - Refer sheet no. 8.4

RETRO™ IP56

HUNZA® 110/240-12 volt ac silicone encapsulated electronic transformer is built into the pole. Dimmable with a suitable dimmer.

* Note see page 7.3 for details.

Lamp Type

MR11 GU4 20 watt lamp max.


LED - Refer sheet no. 8.4

USA and Canada


MR11 GU4 10 watt lamp max.

LED - Refer sheet no. 8.4

MR11 GU4
12 volt 20 watt 10°

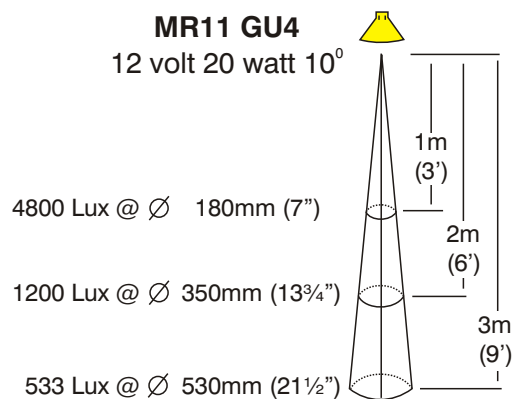

MR11 GU4
12 volt 20 watt 30°

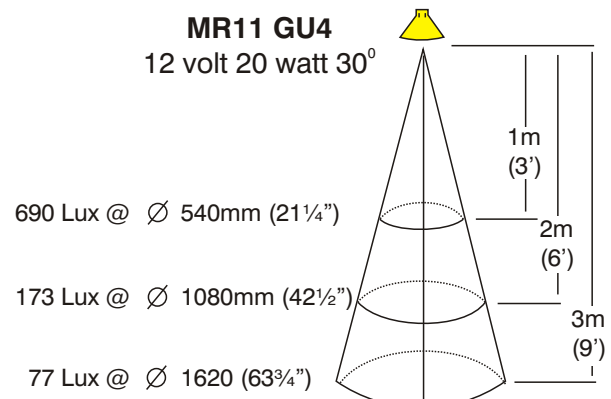

FACTORY: Ph: 64-9-528 9471 Fax: 64-9-528 9361.

USA: Ph. 310 560 7310 Fax. 1 877 692 4589.

hunza@hunza.co.nz www.hunza.co.nz

Specifications may change without notice.

130 Felton Mathew Ave, Glen Innes, Auckland, New Zealand.

3237 Long Island St, W. Sacramento, California 95691, USA.

Manufactured in New Zealand.

© 2004 Hunza Holdings Ltd

Ver 1.2