

Euro Twin Pole Lite

Cat. No. ETPL
Cat. No. ETPL/R


[Click here for specifications on this luminaire](#)

[Return to main index](#)



The Euro Twin Pole Lite is for situations where the luminaire needs to be discreet, the smaller sized MR11 lamp is utilised to achieve this. Each spotlight can be aimed in any direction. This luminaire has a fully adjustable arm allowing 360 degree rotation and 0 - 90° elevation with a built in glare guard.

The Retro™, which is a mains option, avoids the need to bury a transformer. The 110/240-12 volt electronic transformer is built into the pole and is a double insulated safety isolating transformer, this changes the luminaire to an IP 56 rating.

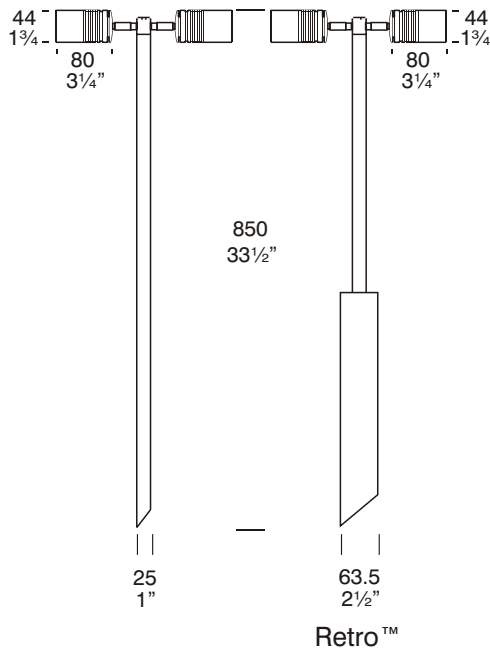

Ordering Information

Luminaire Type	Material	Accessories
ETPL - Euro Twin Pole Lite	Cop - Copper SS - 316 Stainless Steel	CJK150 - CJK150 Cable Joint Kit EFL - Frost Lens LED - LED Array D/LED - LED Driver SSP/G - Hunza® Super Spike /R - Retro™ Transformer 110/240-12 volt
<p>Ordering Example: ETPL COP - Euro Twin Pole Lite in Copper</p> <p>ETPL/R SS - Euro Twin Pole Lite Retro™ in 316 Stainless Steel</p> <p>SSP/G - Hunza® Super Spike (Accessories ordered separately)</p>		



FACTORY: Ph: 64-9-528 9471 Fax: 64-9-528 9361.
USA: Ph. 310 560 7310 Fax. 1 877 692 4589.
hunza@hunza.co.nz www.hunza.co.nz
Specifications may change without notice.

130 Felton Mathew Ave, Glen Innes, Auckland, New Zealand.
3237 Long Island St, W. Sacramento, California 95691, USA.
Manufactured in New Zealand.

Ver 1.2

© 2004 Hunza Holdings Ltd

Luminaire Construction

CNC machined from one of the following metals:

Copper:

Body 45.4mm rod.

Pole 25.4mm (1") x 850mm (33½") tube.

316 Stainless Steel:

Body 45.4mm rod.

Pole 25.4mm (1") x 850mm (33½") tube.

Retro™:

Pole - 25.4mm (1") x 410mm (16") tube.

Transformer Pole 63.5mm (2½") x 440mm (17½").

Mounting

Pole 800mm (31½") directly mounted into the earth or for extra stability in sand or loose ground use a Hunza® Super Spike. Retro™ set in concrete.

Features

Lens:

3mm (1/8") clear tempered shatter resistant glass with Hex Cell Louver for glare control.

Life Time Warranty.

Gaskets:

Silicone, iron impregnated 220°C (428°F).

Lamp Holders:

GU4 - 350°C (662°F) ceramic multi contact lamp holders with 250°C (480°F) teflon cables.

Accessories:

Cable Joint Kit (Cat. CJK150). Not approved for USA /Canada.

Frosted Lens (Cat. EFL).

Hunza Super Spike, not Retro option (Cat. SSP/G).

LED Array Red, Blue, White, Yellow, Green (Cat. LED). Refer sheet 8.4

LED Driver (Cat. D/LED) Refer sheet no. 8.4

Retro™ transformer 110/240-12 volt (Cat. /R) IP56.

Swivels:

Copper fixtures 360° rotation and 0 - 90° elevation, solid brass with anti rust spring.

Stainless Steel fixtures 360° rotation and 0 - 90° elevation, full stainless steel construction.

Standards

IP56 / IP66



UL1838

Luminaire Weight

12 volt

Cop 1.920kg (4lb 3oz)
SS 1.660kg (3lb 10oz)

Retro™

Cop 3.100kg (6lb 13oz)
SS 2.880kg (6lb 5oz)

Power Supply

HUNZA® Inground or Wall Mount Transformer: not included.

LED - Refer sheet no. 8.4

USA and Canada

Wall Mount Transformer: not included.

LED - Refer sheet no. 8.4

RETRO™ IP56

HUNZA® 110/240-12 volt ac silicone encapsulated electronic transformer is built into the pole. Dimmable with a suitable dimmer.

* Note see page 7.3 for details.

Lamp Type



MR11 GU4 2 x 20 watt lamps max.

LED - Refer sheet no. 8.4

USA and Canada

MR11 GU4 2 x 10 watt lamps max.

LED - Refer sheet no. 8.4

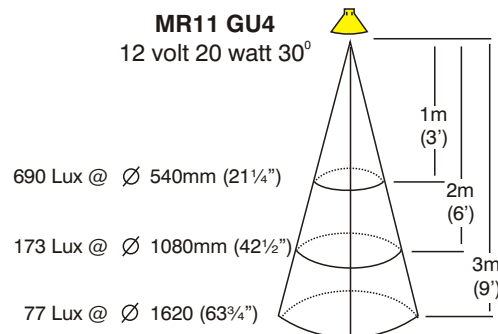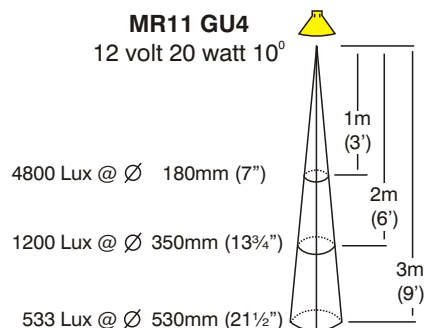

FACTORY: Ph: 64-9-528 9471 Fax: 64-9-528 9361.

USA: Ph. 310 560 7310 Fax. 1 877 692 4589.

hunza@hunza.co.nz www.hunza.co.nz

Specifications may change without notice.

130 Felton Mathew Ave, Glen Innes, Auckland, New Zealand.

3237 Long Island St, W. Sacramento, California 95691, USA.

Manufactured in New Zealand.

Ver 1.2

© 2004 Hunza Holdings Ltd