


# Lawn Lite Deck Mount Version

Cat. No. LLdmv



The Lawn Lite Deck Mount version is designed to be mounted into timber decks. The lamp can be directed up to 20 degrees at a bush, tree, or the outside of a building etc. without the need to remove the luminaire from the deck due to the vandal-resistant three stainless steel allen head screw fixing system, which attaches the flange to the body of the luminaire. The 'Flush Fit' lens stops water pooling and depositing dirt on the lens. The luminaire has a solid bronze or 316 stainless steel flange with a powder coated black body.

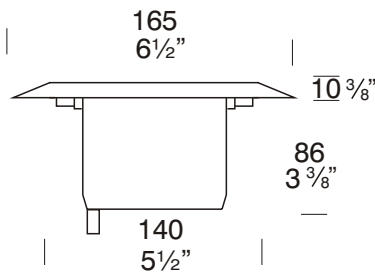

### Ordering Information

#### Luminaire Type

LLdmv - Lawn Lite  
Deck Mount

#### Flange Option

BZ - Bronze  
SS - 316 Stainless Steel

#### Body

Black only

#### Accessories

CJK150 - Cable Joint Kit  
HCR - Hex Cell Louver  
LLFL - Frosted Lens

Ordering Example: LLDMV SS- Lawn Lite Deck Mount with  
316 Stainless Steel Flange

LLFL - Frosted Lens

*(Accessories ordered separately)*



**FACTORY:** Ph: 64-9-528 9471 Fax: 64-9-528 9361.

**USA:** Ph. 310 560 7310 Fax. 1 877 692 4589.

hunza@hunza.co.nz www.hunza.co.nz

Specifications may change without notice.

130 Felton Mathew Ave, Glen Innes, Auckland, New Zealand.

3237 Long Island St, W. Sacramento, California 95691, USA.

Manufactured in New Zealand.

© 2004 Hunza Holdings Ltd

Ver 1.2

## Luminaire Construction

### Body:

Cast from virgin high corrosion resistant CC401 low copper aluminium alloy, with chromate substrate and high UV resistant polyester powder coat -

**Body Colour:** Black.

### Flanges:

The flange is attached to the body by three 316 stainless steel allen head anti vandal screws and is available in either -

Powder coated, cast aluminium or CNC machined from one of the following metals:

Solid bronze -165mm (6½") bar.

Solid 316 Stainless Steel 165mm (6½") rod.

## Mounting

Deck mount version for mounting through a 145mm (5½") hole in a wooden or concrete deck.

*The Lawn Lite Deck Mount is Not suitable for driving over.*

## Features

### Lens:

12mm (½") 'Flush Fit' clear tempered shatter resistant glass.

Life Time Warranty.

### Gasket:

Nytrol 220c (428<sup>o</sup>f).

### Lamp Holder:

GU5.3 350<sup>o</sup>c (662<sup>o</sup>f) ceramic multi contact lamp holder with 250<sup>o</sup>c (480<sup>o</sup>f) teflon cables. Lamp holder can be rotated 360<sup>o</sup> and angled up to 20<sup>o</sup>.

### Accessories:

Cable Joint Kit (Cat. CJK150).  
Not approved for USA / Canada.

Frosted Lens (Cat. LLFL).

Hex Cell Louver (Cat. HCR)

## Standards

IP66



UL1838

## Luminaire Weight

LLDMVBZ 1.220kg (2lbs 11oz)  
LLDMVSS 1.510kg (3lbs 5oz)

## Power Supply

HUNZA<sup>®</sup> Inground or Wall Mount  
Transformer: not included.

## USA and Canada:










HUNZA<sup>®</sup> Wall Mount Transformer:  
not included.

## Luminaire: supplied with

MR16 GU5.3 20, 35 or 50 watt  
lamp max.

## USA and Canada:

MR16 GU5.3 20 watt lamp max.

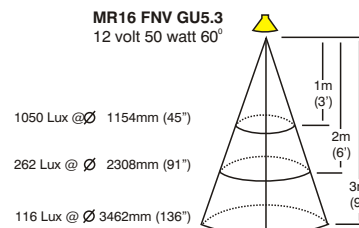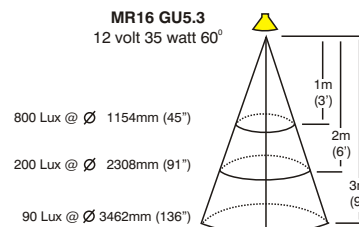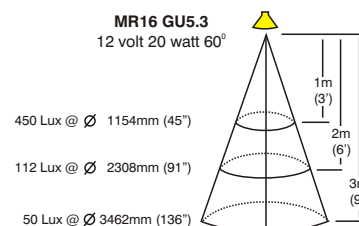

**FACTORY:** Ph: 64-9-528 9471 Fax: 64-9-528 9361.

**USA:** Ph. 310 560 7310 Fax. 1 877 692 4589.

hunza@hunza.co.nz www.hunza.co.nz

Specifications may change without notice.

130 Felton Mathew Ave, Glen Innes, Auckland, New Zealand.

3237 Long Island St, W. Sacramento, California 95691, USA.

Manufactured in New Zealand.

© 2004 Hunza Holdings Ltd

Ver 1.2