

Mouse Lite™ Square

Cat. No. MOUSESQbz

Cat. No. MOUSESQss


[Click here for specifications on this luminaire](#)

[Return to main index](#)



The Mouse Lite™ Square is a solid bronze or solid 316 stainless steel luminaire for surface mounting. A space in the wall behind the luminaire is not required for cable connection due to the design that includes a cable connection junction cavity. There is no light directed upward or forward into the eye.

The Retro™ is a 110/240-12 ac mains option suited to an installation where mounting a transformer is a problem, e.g. a brick wall where there is only the cable protruding out of the wall and it is not an option to recess the transformer or when replacing an existing light fitting.

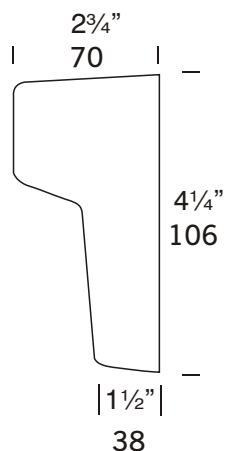

Ordering Information

Luminaire Type

MOUSESQ - Mouse
Lite Square

Flange Option

BZ - Bronze
SS - 316 Stainless Steel

Accessories

CJK150 - Cable Joint Kit
LED - LED Array
/R - Retro™ Transformer
110/240-12 volt

Ordering Example MOUSESQ SS - Mouse Lite Square in
316 Stainless Steel

MOUSESQ/R BZ - Mouse Lite Square Retro™ in Bronze

(Accessories ordered separately)



FACTORY: Ph: 64-9-528 9471 Fax: 64-9-528 9361.

USA: Ph. 310 560 7310 Fax. 1 877 692 4589.

hunza@hunza.co.nz www.hunza.co.nz

Specifications may change without notice.

130 Felton Mathew Ave, Glen Innes, Auckland, New Zealand.

3237 Long Island St, W. Sacramento, California 95691, USA.

Manufactured in New Zealand.

© 2004 Hunza Holdings Ltd

Ver 1.2

Luminaire Construction
 CNC finished machined from one of the following metals:
 Investment cast in bronze with forged brass mounting plate.
 Investment cast in 316 stainless steel with investment cast 316 stainless steel mounting plate.

Mounting
 Mounted using two countersunk phillips head screws directly into the mounting surface.


Features

Lens:
 2mm (3/32") frosted tempered shatter resistant glass.
 Life Time Warranty.

Gasket:
 Nytrol 150°c (302°f).

Lamp Holder:
 GU4 - 350°c (662°f) ceramic multi contact lamp holder with 180°c (356°f) silicone cables.

Accessories:
 Cable Joint Kit (Cat. CJK 50) Not approved for USA /Canada.
 LED Array Red, Blue, White, Yellow, Green (Cat. LED). Refer sheet 8.4
 Retro™ transformer 110/240-12 volt (Cat. /R).


Standard
IP66 NZ/ANS61046  **UL1838**

Luminaire Weight
 12 volt BZ .820kg (1lb 12oz)
 SS .750kg (1lb 10oz)
 Retro™ BZ .920kg (2lb)
 SS .850kg (1lb 13oz)


Power Supply
 HUNZA® Inground or Wall Mount Transformer: not included.
 LED - Refer sheet no. 8.4
USA and Canada:
 HUNZA® Wall Mount Transformer: not included.
 LED - Refer sheet no. 8.4
RETRO™
 HUNZA 110/240-12 volt ac silicone encapsulated electronic transformer built into the base.
 Dimmable with a suitable dimmer.
 * Note see page 7.4 for details.

Luminaire: supplied with
 GU4 5, 10, 20 watt lamp max.
 Retro™ GU4 10, 20 watt lamp max.
USA and Canada:
 GU4 5, 10 watt lamp max.
 Retro™ GU4 5,10 watt lamp max.

Mouse Lite Square 10 watt GU4 Bi-Pin lamp - Lens height 400mm (15¾")

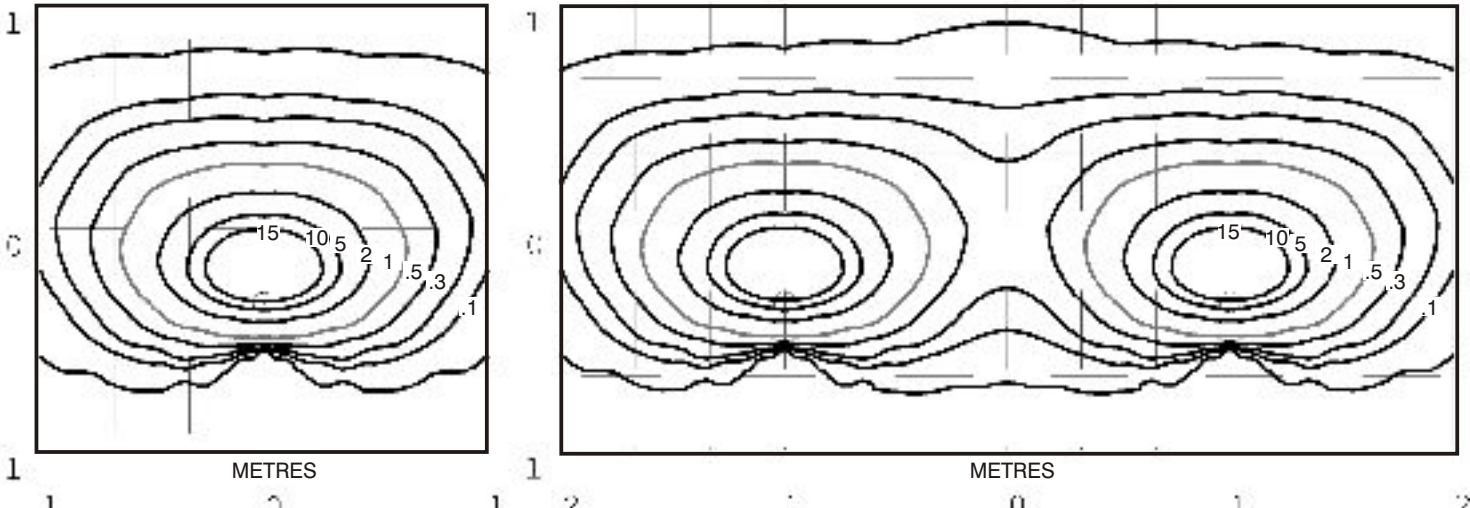

Mouse Lite Square 20 watt GU4 Bi-Pin lamp - Lens height 400mm (15¾")

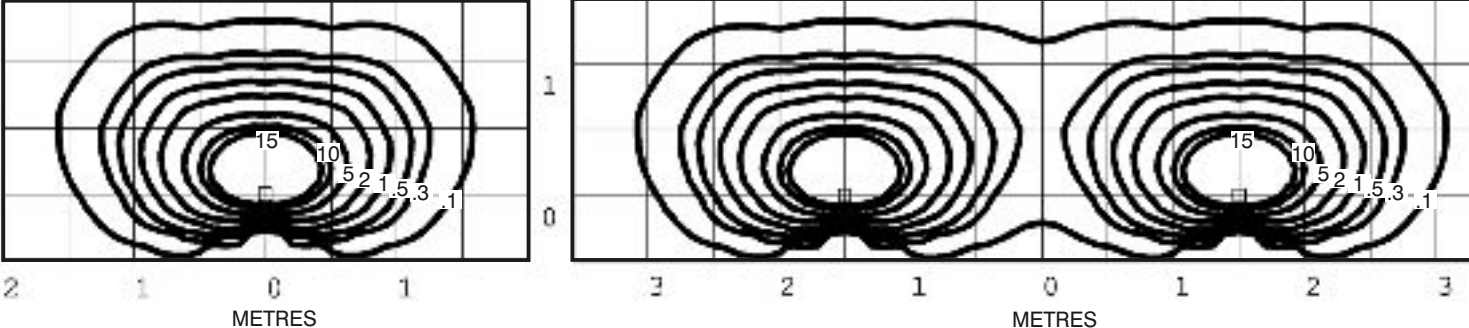

Isolux Lumens Plot - Footcandles = Isolux figures divided by 10.76



FACTORY: Ph: 64-9-528 9471 Fax: 64-9-528 9361.
USA: Ph. 310 560 7310 Fax. 1 877 692 4589.
 hunza@hunza.co.nz www.hunza.co.nz
 Specifications may change without notice.

130 Felton Mathew Ave, Glen Innes, Auckland, New Zealand.
 3237 Long Island St, W. Sacramento, California 95691, USA.
 Manufactured in New Zealand.
 Ver 1.2 © 2004 Hunza Holdings Ltd