




Designed with a threaded 1/2" NPS base, this luminaire is easily fixed to a Hunza® Super Spike ground stake, Hunza® Tree Mount Kit or any 1/2" NPS fitting. It has a fully adjustable head allowing 360 degree rotation and 0 - 90 degree elevation. The luminaire uses an MR16 GU5.3 lamp and is ideal for illuminating bushes and trees from ground level.

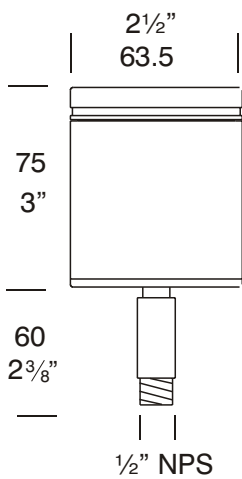

Ordering Information

Luminaire Type	Material/Finish	Accessories
NPS - NPS Spot	BK - Black BZ - Bronze GN - Green MS - Metallic Silver COP - Copper SS - 316 Stainless Steel	GG - Glare Guard HCL - Hex Cell Louvre Adaptor DFL - Frosted Lens LED - LED Array D/LED - LED Driver SSP/G - Hunza® Super Spike SSP/T - Hunza® Tree Mount Adaptor

Ordering Example NPS BK - NPS Spot in Black

HCL COP - Hex Cell Louvre Adaptor in Copper
(Accessories ordered separately)



Shown with Hex Cell Louvre Adaptor

Patent Pending



FACTORY: Ph: 64-9-528 9471 Fax: 64-9-528 9361.
USA: Ph. 310 560 7310 Fax. 1 877 692 4589.
 hunza@hunza.co.nz www.hunza.co.nz
 Specifications may change without notice.

130 Felton Mathew Ave, Glen Innes, Auckland, New Zealand.
 3237 Long Island St, W. Sacramento, California 95691, USA.
 Manufactured in New Zealand.

Ver 1.2

© 2004 Hunza Holdings Ltd

Luminaire Construction

CNC machined from one of the following metals:

High corrosion resistant 63.5mm (2½") x 10mm (25/64") aluminium.
End cap - solid aluminium 63.5mm (2½") rod, with chromate substrate and high UV resistant polyester powder coat -

Colours Black, Bronze, Green, Metallic Silver.

Copper 63.5mm (2½") x 10mm (13/32"). End cap - solid copper 63.5mm (2½") rod.

316 Stainless Steel 63.5mm (2½") x 9mm (11/32"). End cap - solid 316 stainless steel 63.5mm (2½") rod.

Mounting

Designed with a ½" NPS thread, this luminaire is easily fitted to a Hunza® Super Spike or Hunza® Tree Mount Adaptor. It also fits any ½" NPS threaded fitting.

Features

Lens:

3mm (1/8") clear tempered shatter resistant glass. Life Time Warranty.

Gaskets:

Silicone, iron impregnated 220°C (428°F).

Lamp Holder:

GU5.3 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) teflon cables.

Accessories:

Frosted Lens (Cat. DFL).

Glare Guard (Cat. GG.).

Hex Cell Louvre Adaptor (Cat. HCL).

Hunza® Super Spike (Cat. SSP/G).

Hunza® Tree Mount Adaptor (Cat. SSP/T).

LED Array Red, Blue, White, Yellow, Green (Cat. LED). Refer sheet 8.4

LED Driver (Cat. D/LED) Refer sheet no. 8.4

Swivel:

Aluminium and Copper luminaires - 360° rotation and 0 - 90° elevation, solid brass with anti rust spring.

Stainless Steel luminaires - 360° rotation and 0 - 90° elevation, full stainless steel construction.

Standards

IP66  UL1838

Luminaire Weight

Alum .450kg (15oz)
Cop 1.25kg (2lb 12oz)
SS .960kg (2lb 1oz)

Power Supply

HUNZA® Inground or Wall Mount Transformer: not included.

LED - Refer sheet no. 8.4

USA and Canada:

HUNZA® Wall Mount Transformer: not included.

LED - Refer sheet no. 8.4

Luminaire: supplied with

MR16 GU5.3 - 20, 35 or 50 watt lamp max.










LED - Refer sheet no. 8.4

USA and Canada:

MR16 GU5.3 20 watt lamp.

When glare guard fitted lamp wattage can be increased to 35 watt.

LED - Refer sheet no. 8.4

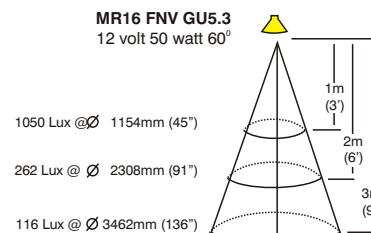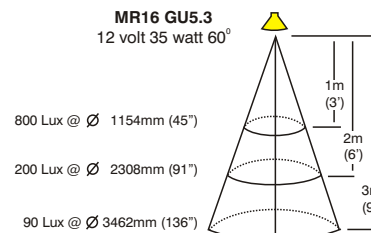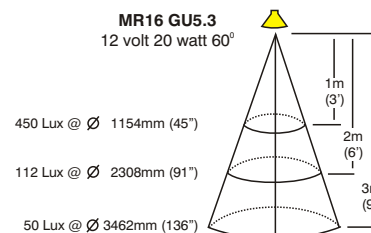

FACTORY: Ph: 64-9-528 9471 Fax: 64-9-528 9361.

USA: Ph. 310 560 7310 Fax. 1 877 692 4589.

hunza@hunza.co.nz www.hunza.co.nz

Specifications may change without notice.

130 Felton Mathew Ave, Glen Innes, Auckland, New Zealand.

3237 Long Island St, W. Sacramento, California 95691, USA.

Manufactured in New Zealand.

Ver 1.2

© 2004 Hunza Holdings Ltd