

Single Pole Lite

Cat. No. SPL

Cat. No. SPL/R


[Click here for specifications on this luminaire](#)

[Return to main index](#)



A single spotlight which can be aimed in any direction. The fitting has a fully adjustable arm allowing 360 degree rotation and 0 - 90 degree elevation. The Single Pole Lite is ideal for path lighting as well as tree lighting, or the head may be aimed downward to eliminate vertical light.

The Retro™, which is a mains option, avoids the need to bury a transformer. The 110/240-12 volt electronic transformer is built into the pole and is a double insulated safety isolating transformer, this changes the luminaire to an IP56 rating.

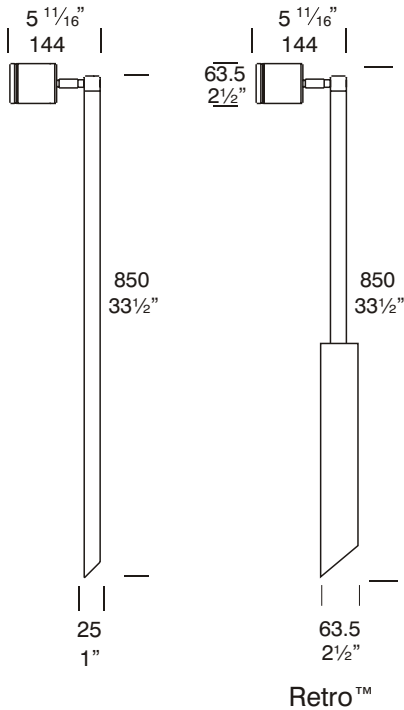

Ordering Information

Luminaire Type	Material/Finish	Accessories
SPL - Single Pole Lite	BK - Black BZ - Bronze GN - Green MS - Metallic Silver WH - White	CJK150 - CJK150 Cable Joint Kit DFL - Frost Lens GG - Glare Guard HCL - Hex Cell Louvre Adaptor LED - LED Array D/LED - LED Driver
	COP - Copper SS - 316 Stainless Steel	/R - Retro™ Transformer 110/240-12 volt SSP/G - Hunza® Super Spike

Ordering Example: SPL SS - Single Pole Lite in 316 Stainless Steel

SPL/R COP - Single Pole Lite Retro™ in Copper

HCL - Hex Cell Louvre Adaptor
(Accessories ordered separately)



Patent Pending



FACTORY: Ph: 64-9-528 9471 Fax: 64-9-528 9361.

USA: Ph. 310 560 7310 Fax. 1 877 692 4589.

hunza@hunza.co.nz www.hunza.co.nz

Specifications may change without notice.

130 Felton Mathew Ave, Glen Innes, Auckland, New Zealand.

3237 Long Island St, W. Sacramento, California 95691, USA.

Manufactured in New Zealand.

© 2004 Hunza Holdings Ltd

Ver 1.2

Luminaire Construction

CNC machined from one of the following metals:

High corrosion resistant 63.5mm (2½") x 10mm (25/64") aluminium.
End cap - solid aluminium 63.5mm (2½") rod, with chromate substrate and high UV resistant polyester powder coat - Colours Black, Bronze, Green, Metallic Silver, White.

Copper 63.5mm (2½") x 10mm (13/32"). End cap - solid copper 63.5mm (2½") rod.

Stainless steel 316 9mm (11/32"). End cap - solid 316 stainless steel 63.5mm (2½") rod.

Poles: Aluminium, Copper, 316 Stainless 25.4mm (1") x 850mm (33½") tube.

Retro™: Pole - 25.4mm (1") x 410mm (16") tube.

Transformer Pole 63.5mm (2½") x 440mm (17½").

Mounting

Pole 850mm (33½") directly mounted into the earth or for extra stability in sand or loose ground use a Hunza® Super Spike. Retro™ - set in concrete.

Features

Lens:

3mm (1/8") clear tempered shatter resistant glass. Life Time Warranty.

Gaskets:

Silicone, iron impregnated 220°c (428°f).

Lamp Holder:

GU 5.3 - 350°c (662°f) ceramic multi contact lamp holder with 250°c (480°f) teflon cables.

Accessories:

Cable Joint Kit (Cat. CJK 50). Not approved for USA /Canada. Frosted Lens (Cat. DFL). Glare Guard (Cat. GG)

Hex Cell Louvre Adaptor (Cat. HCL) Hunza® Super Spike, not Retro™ option (Cat. SSP/G).

LED Array Red, Blue, White, Yellow, Green (Cat. LED). Refer sheet 8.4 LED Driver (Cat. D/LED) Refer sheet no. 8.4

Retro™ transformer 110/240-12 volt (Cat. /R) IP56.

Swivel :

Aluminium and Copper luminaires - 360° rotation and 0 - 90° elevation, solid brass with anti rust spring.

Stainless Steel luminaires 360° rotation and 0 - 90° elevation, full stainless steel construction.

Standards

IP56 / IP66



UL1838

Luminaire Weight

12 volt: Alum .655kg (1lb 7oz)
Cop 2.140kg (4lb 11oz)
SS 1.620kg (3lb 9oz)
Retro™: Alum 2.000kg (4lb 6oz)
Cop 3.200kg (7lb)
SS 3.055kg (6lb 11oz)

Power Supply

HUNZA® Inground or Wall Mount Transformer: not included.

LED - Refer sheet no. 8.4

RETRO™ IP56

HUNZA® 110/240-12 volt ac silicone encapsulated electronic transformer is built into the pole. Dimmable with a suitable dimmer.

* Note see page 7.3 for details.

USA and Canada

HUNZA® Wall Mount Transformer: not included.

LED - Refer sheet no. 8.4

Luminaire: supplied with

MR16 GU5.3 20, 35, 50 watt lamp max.

Retro™ MR16 GU5.3 20, 35, 50 watt lamp max.










LED - Refer sheet no. 8.4

USA and Canada

MR16 GU5.3 20 watt lamp.

When glare guard fitted lamp wattage can be increased to 35 watt.

LED - Refer sheet no. 8.4

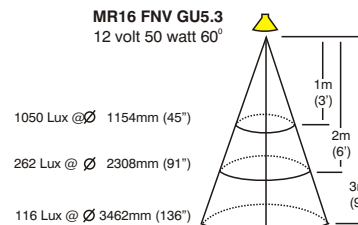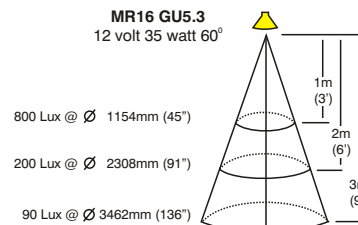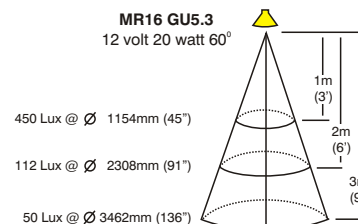

FACTORY: Ph: 64-9-528 9471 Fax: 64-9-528 9361.

USA: Ph. 310 560 7310 Fax. 1 877 692 4589.

hunza@hunza.co.nz www.hunza.co.nz

Specifications may change without notice.

130 Felton Mathew Ave, Glen Innes, Auckland, New Zealand.

3237 Long Island St, W. Sacramento, California 95691, USA.

Manufactured in New Zealand.

Ver 1.2

© 2004 Hunza Holdings Ltd