

Spike Spot Adjustable


Cat. No. SS/A

[Click here for specifications on this luminaire](#)

[Return to main index](#)



This luminaire is easily inserted into the ground and has a fully adjustable head allowing 360 degree rotation and 0 - 90 degree elevation adjustment. This luminaire uses a MR16 GU 5.3 lamp.

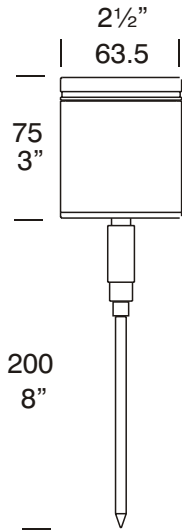

Ordering Information

Luminaire Type

SS/A - Spike Spot Adjustable

Material/Finish

BK - Black
BZ - Bronze
GN - Green
MS - Metallic Silver

COP - Copper
SS - 316 Stainless Steel

Accessories

CJK 150 - Cable Joint Kit
DFL - Frosted Lens
GG - Glare Guard
HCL - Hex Cell Louvre Adaptor
LED - LED Array
D/LED - LED Driver
/300 - Ground Spike 300mm (12")

Ordering Example SS/A COP - Spike Spot Adjustable in Copper

GG BK - Glare Guard in Black
(Accessories ordered separately)



SHOWN WITH OPTIONAL GLARE GUARD

Patent Pending



FACTORY: Ph: 64-9-528 9471 Fax: 64-9-528 9361.

USA: Ph. 310 560 7310 Fax. 1 877 692 4589.

hunza@hunza.co.nz www.hunza.co.nz

Specifications may change without notice.

130 Felton Mathew Ave, Glen Innes, Auckland, New Zealand.

3237 Long Island St, W. Sacramento, California 95691, USA.

Manufactured in New Zealand.

Ver 1.2

© 2004 Hunza Holdings Ltd

Luminaire Construction

CNC machined from one of the following metals:

High corrosion resistant 63.5mm (2 1/2") x 10mm (25/64") aluminium.
End cap - solid aluminium 63.5mm (2 1/2") rod, with chromate substrate and high UV resistant polyester powder coat -

Colours Black, Bronze, Green, Metallic Silver.

Copper 63.5mm (2 1/2") x 10mm (13/32"). End cap - solid copper 63.5mm (2 1/2") rod.

Stainless steel 316 9mm (11/32"). End cap - solid 316 stainless steel 63.5mm (2 1/2") rod.

Mounting

Ground spike 150mm (6") or 300mm (12") directly into the earth.

Features

Lens:

3mm (1/8") clear tempered shatter resistant glass

Life Time Warranty

Gasket:

Silicone, iron impregnated 220^oc (428^of)

Lamp Holder:

GU5.3 - 350^oc (662^of) ceramic multi contact lamp holder with 250^oc (480^of) teflon cables.

Accessories:

Cable Joint Kit (Cat. CJK 50) Not approved for USA /Canada.

Frosted Lens (Cat. DFL).

Glare Guard (Cat. GG).

Hex Cell Louvre Adaptor (Cat. HCL).
300mm (12") Spike (Cat. /300).

Swivel :

Aluminium and Copper luminaires - 360^o rotation and 0 - 90^o elevation, solid brass with anti rust spring.

Stainless Steel luminaires - 360^o rotation and 0 - 90^o elevation, full stainless steel construction.

Standards

IP66



UL1838

Luminaire Weight

Alum .490kg (1lb 1oz)
Cop 1.240kg (2lb 11oz)
SS 1.080kg (2lb 6oz)

Power Supply

HUNZA[®] Inground or Wall Mount Transformer: not included.
LED - Refer sheet no. 8.4

USA and Canada:

HUNZA[®] Wall Mount Transformer: not included.
LED - Refer sheet no. 8.4

Luminaire: supplied with

MR16 GU5.3 - 20, 35 or 50 watt lamp max.










LED - Refer sheet no. 8.4

USA and Canada:

MR16 GU5.3 20 watt lamp.

LED - Refer sheet no. 8.4

When glare guard fitted lamp wattage can be increased to 35 watts.

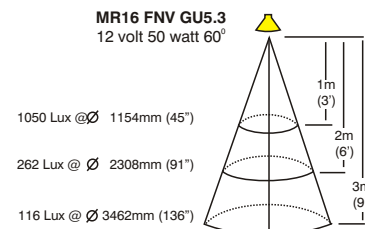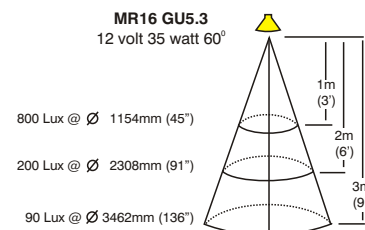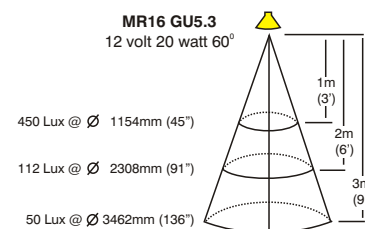

FACTORY: Ph: 64-9-528 9471 Fax: 64-9-528 9361.

USA: Ph. 310 560 7310 Fax. 1 877 692 4589.

hunza@hunza.co.nz www.hunza.co.nz

Specifications may change without notice.

130 Felton Mathew Ave, Glen Innes, Auckland, New Zealand.

3237 Long Island St, W. Sacramento, California 95691, USA.

Manufactured in New Zealand.

Ver 1.2

© 2004 Hunza Holdings Ltd