




This luminaire is inserted into the ground and can be easily aimed by angling the luminaire in the desired direction. This luminaire uses a MR16 GU 5.3 lamp and is ideal for illuminating bushes and trees from ground level.

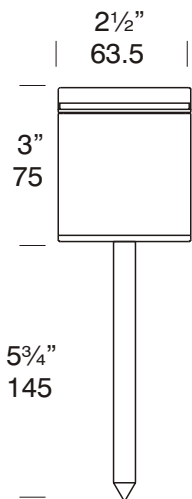

Ordering Information

Luminaire Type	Material/Finish	Accessories
SS - Spike Spot	BK - Black BZ - Bronze GN - Green MS - Metallic Silver COP - Copper SS - 316 Stainless Steel	CJK150 - Cable Joint Kit DFL - Frosted Lens GG - Glare Guard HCL - Hex Cell Louvre Adaptor LED - LED Array D/LED - LED Driver /300 - Ground Spike 300mm (12")
Ordering Example SS COP - Spike Spot in Copper		
GG BK - Glare Guard in Black (Accessories ordered separately)		



Patent Pending



FACTORY: Ph: 64-9-528 9471 Fax: 64-9-528 9361.
USA: Ph. 310 560 7310 Fax. 1 877 692 4589.
hunza@hunza.co.nz www.hunza.co.nz
Specifications may change without notice.

130 Felton Mathew Ave, Glen Innes, Auckland, New Zealand.
3237 Long Island St, W. Sacramento, California 95691, USA.
Manufactured in New Zealand.

Ver 1.2

© 2004 Hunza Holdings Ltd

Luminaire Construction

CNC machined from one of the following metals:

High corrosion resistant 63.5mm (2½") x 10mm (25/64") aluminium.
End cap - solid aluminium 63.5mm (2½") rod, with chromate substrate and high UV resistant polyester powder coat -

Colours Black, Bronze, Green, Metallic Silver.

Copper 63.5mm (2½") x 10mm (13/32"). End cap - solid copper 63.5mm (2½") rod.

Stainless steel 316 9mm (11/32"). End cap - solid 316 stainless steel 63.5mm (2½") rod.

Mounting

Ground spike 150mm (6") or 300mm (12") directly into the earth.

Features

Lens:

3mm (1/8") clear tempered shatter resistant glass.

Life Time Warranty.

Gaskets:

Silicone, iron impregnated 220°C (428°F).

Lamp Holder:

GU5.3 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) teflon cables.

Accessories:

Cable Joint Kit (Cat. CJK150).
Not approved for USA/Canada.

Frosted Lens (Cat. DFL).

Glare Guard (Cat. GG.)

Hex Cell Louvre Adaptor (Cat. HCL).

LED Array Red, Blue, White, Yellow, Green (Cat. LED). Refer sheet 8.4

LED Driver (Cat. D/LED) Refer sheet no. 8.4

300mm (12") Spike (Cat. /300)

Standards

IP68



UL1838

Luminaire Weight

Alum .450kg (15oz)
Cop 1.250kg (2lb 12oz)
SS .960kg (2lb 1oz)

Power Supply

HUNZA® Inground or Wall Mount
Transformer: not included.
LED - Refer sheet no. 8.4

USA and Canada:

HUNZA® Wall Mount Transformer:
not included.
LED - Refer sheet no. 8.4

Luminaire: supplied with

MR16 GU5.3 - 20, 35 or 50 watt
lamp max.










LED - Refer sheet no. 8.4

USA and Canada:

MR16 GU5.3 20 watt lamp.

LED - Refer sheet no. 8.4

When glare guard fitted lamp
wattage can be increased to 35
watt.

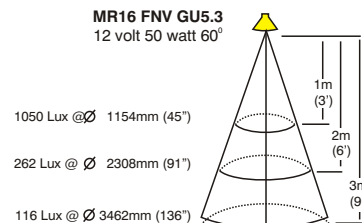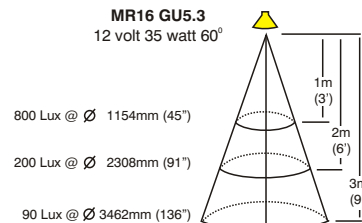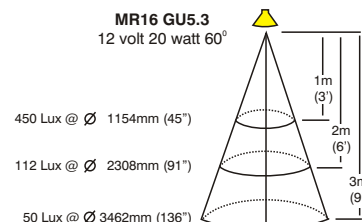

FACTORY: Ph: 64-9-528 9471 Fax: 64-9-528 9361.

USA: Ph. 310 560 7310 Fax. 1 877 692 4589.

hunza@hunza.co.nz www.hunza.co.nz

Specifications may change without notice.

130 Felton Mathew Ave, Glen Innes, Auckland, New Zealand.

3237 Long Island St, W. Sacramento, California 95691, USA.

Manufactured in New Zealand.

Ver 1.2

© 2004 Hunza Holdings Ltd