


# Spike Spot

Cat. No. SS



The Spike Spot is inserted into the ground and can be easily aimed by angling the luminaire in the desired direction. This fixture uses a MR16 lamp and is ideal for illuminating bushes and trees from ground level.

The luminaire is machined from a choice of 10mm thick aluminium with a UV stable powder coated finish, solid copper or 316 stainless steel with a clear, tempered, flush glass lens and high temperature silicon gaskets.

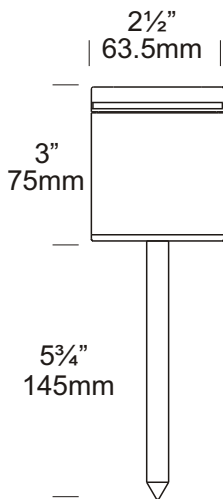

## Ordering Information

Luminaire Type	Material/Finish	Accessories
SS - Spike Spot	BK - Black BZ - Bronze GN - Green STAR - Silver Star COP - Copper SS - 316 Stainless Steel	CJK150 - Cable Joint Kit LENSSTEPF - Frosted Lens GG - Glare Guard HCL - Hex Cell Louvre Adaptor /300 - Ground Spike 300mm (12") For an alternative LED option start at page 10.4
Ordering Example: SS COP - Spike Spot in Copper		GG BK - Glare Guard in Black (Accessories ordered separately)

## Luminaire Construction

CNC machined from one of the following metals:

High corrosion resistant 63.5mm (2½") x 10mm (25/64") aluminium. End cap - solid aluminium 63.5mm (2½") rod, with chromate substrate and high UV resistant polyester powder coat

**Colours** Black, Bronze, Green, Silver Star.

**Copper** 63.5mm (2½") x 10mm (13/32"). End cap - solid copper 63.5mm (2½") rod.

**316 Stainless Steel** 9mm (11/32"). End cap - solid 316 stainless steel 63.5mm (2½") rod.

## Mounting

Ground spike 150mm (6") or 300mm (12") directly into the earth.

## Features

Lens:

10mm (3/8") clear flush fit shatter resistant glass.

Life Time Warranty.

Gaskets:

Silicone, iron impregnated 220°C (428°F).

Lamp Holder:

GU5.3 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) teflon cables.

Accessories:

Cable Joint Kit (Cat. CJK150).

Not approved for USA /Canada.

Frosted Lens (Cat. LENSSTEPF).

Glare Guard (Cat. GG).

Hex Cell Louvre Adaptor (Cat. HCL).

300mm (12") Spike (Cat. /300).

## Standards

IP68



UL1838

## Luminaire Weight

Alum .450kg (15oz)  
Cop 1.250kg (2lb 12oz)  
SS .960kg (2lb 1oz)

## Power Supply

HUNZA™ Inground or Wall Mount Transformer: not included.

USA and Canada:

HUNZA™ Wall Mount Transformer: not included.

Luminaire: supplied with MR16 GU5.3 - 20, 35 or 50 watt lamp max.










**LED** - Refer sheet no. 10.4

USA and Canada:

MR16 GU5.3 20 watt lamp.

**LED** - Refer sheet no. 10.4

When glare guard fitted lamp wattage can be increased to 35 watt.

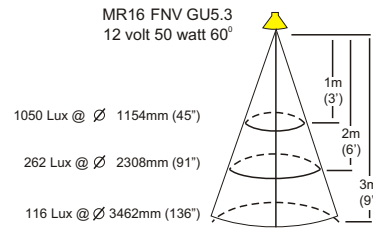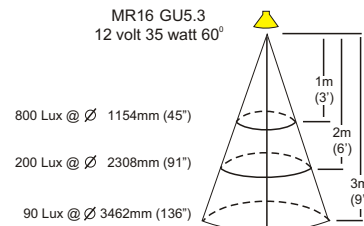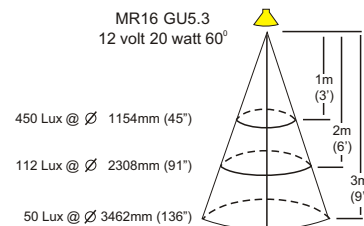

**HUNZA™** PURE OUTDOOR LIGHTING

HUNZA FACTORY  
130 Felton Mathew Ave  
Glen Innes  
Auckland 1072  
New Zealand

Ph: 64-9-528 9471  
Fax: 64-9-528 9361  
hunza@hunza.co.nz  
www.hunza.co.nz

INTERNATIONAL CONTACTS:  
www.hunza.co.nz/contacts.php

Specifications may change without notice.  
Manufactured in New Zealand.

© 2009 Hunza Holdings Ltd.

Ver 1.4