



Step Lite Square on Square

Cat. No. SLSQ/SQ



The Step Lite Square on Square is a Step Lite that has a second square, frosted, glass lens recessed into the flange to provide a more contemporary look for modern installations.

A 110/240 volt fluorescent option is available which offers excellent light output, low energy usage and very low heat generation, this changes the luminaire to an IP66 rating.

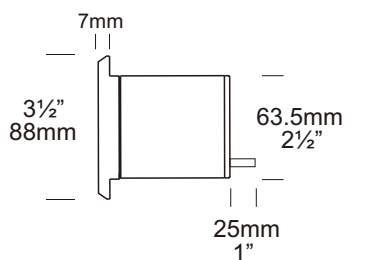

Step Lite Canister



Ordering Information

Luminaire Type

Material

Accessories

SLSQ/SQ - Step Lite Square on Square
 SS - 316 Stainless Steel
 COP - Copper

CJK150 - Cable Joint Kit
 Canss - 316 Stainless Steel Canister
 LENSSTEPF - Frosted Lens
 FL - Fluorescent Option
 Flucan - Fluorescent Canister
 HCL - Hex Cell Adaptor
 For an alternative LED option start at page 10.4

Ordering Example: SLSQ/SQ SS - Step Lite Square on Square in 316 Stainless Steel

FL - Fluorescent Option 110/240 volt
 (Accessories ordered separately)

HUNZATM PURE OUTDOOR LIGHTING

HUNZA FACTORY
 130 Felton Mathew Ave
 Glen Innes
 Auckland 1072
 New Zealand

Ph: 64-9-528 9471
 Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunza.co.nz

INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without notice.
 Manufactured in New Zealand.
 © 2009 Hunza Holdings Ltd.

Ver 1.4

Luminaire Construction

CNC machined from:

Body:

Copper and 316 Stainless Steel
63.5mm (2½") x 9mm (11/32"). End cap - solid 316 stainless steel 63.5mm (2½") rod.

Flange:

90mm x 90mm (3½" x 3½") solid copper and 316 stainless steel bar.

Mounting

The luminaire is pushed into the canister and is held by two silicone "O" rings: Canss, FLucan are cast into concrete, brick, concrete block, etc.

Features

Lenses:
3mm (1/8") clear tempered shatter resistant glass.

Life Time Warranty.

Gasket:
Silicone, iron impregnated 220°C (428°F).

Lamp Holders:
GU5.3 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) teflon cables.

Fluorescent
E27 PET 210°C (410°F) base mount.
E26 available in the USA.

Accessories:

Cable Joint Kit (Cat. CJK150)
Not approved for USA /Canada.
Frosted Lens (Cat. LENSSTEPF).
Fluorescent Canister PVC (Cat. Flucan).

Fluorescent Option 8 watt 240 volt (Cat. FL) IP66.

Hex Cell Louvre Adaptor (Cat. HCL)
(Note: Supplied as standard for USA/Canada).

316 Stainless Canister for use in lime stone etc. (Cat. Canss).

Standards

EN60598

IP66/IP68



UL1838

Luminaire Weight

SS 1.175kg (2lb 9oz)

Fluorescent IP66

SS 1.810kg (3lb 15oz)

Power Supply

HUNZA™ Inground or Wall Mount Transformer: not included.

USA and Canada:

HUNZA™ Wall Mount Transformer: not included.

Luminaire: supplied with

MR16 GU5.3 - 20 watt lamp max.


LED - Refer sheet no. 10.4

Fluorescent
E27 - 110/240 volt self ballasted lamp.


USA and Canada:
MR16 GU5.3 20 watt lamp max.

LED - Refer sheet no. 10.4.


MR16 ESX GU5.3
12 volt 20 watt 10°

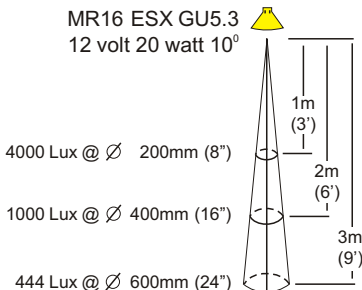

MR16 BAB GU5.3
12 volt 20 watt 38°

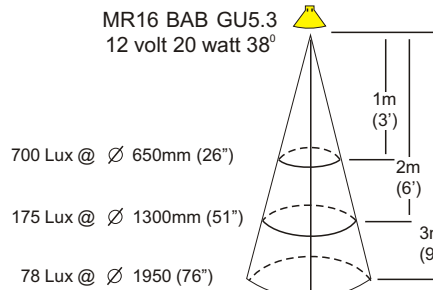

MR16 GU5.3
12 volt 20 watt 60°

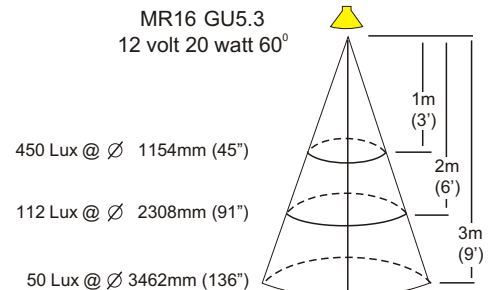

These diagrams refer to the Spot Lite Flange (D) only.

HUNZA™ PURE OUTDOOR LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Glen Innes
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunza.co.nz

INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without notice.
Manufactured in New Zealand.
© 2009 Hunza Holdings Ltd.

Ver 1.4