

# Tier Lite Wall Mount

Cat. No. TLWM  
 Cat. No. TLWM/R  
 Cat. No. TLWMFL  
 Cat. No. TLWVG9






The Tier Lite Wall Mount is a wall-mountable version of the Tier Lite. This luminaire provides 360 degree illumination on a horizontal plane, without projecting any vertical light and is ideal for lighting areas such as porches or entrance ways.

The Tier Lite Wall Mount is available in 316 stainless steel, copper and powder-coated aluminium and comes standard with a 260mm hood.

The Retro™ is a 110/240-12 ac mains option suited to an installation where mounting a transformer is a problem, e.g. a brick wall where there is only the cable protruding out of the wall and it is not an option to recess the transformer or when replacing an existing light fitting. The base increases in size to accommodate the encapsulated IP66 dimmable transformer.

A G9 version of this luminaire is also available for line voltage lamps.

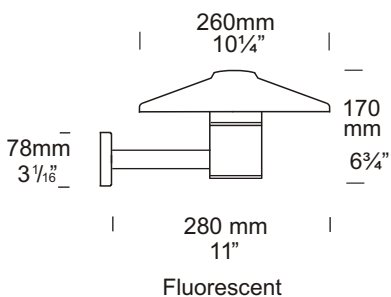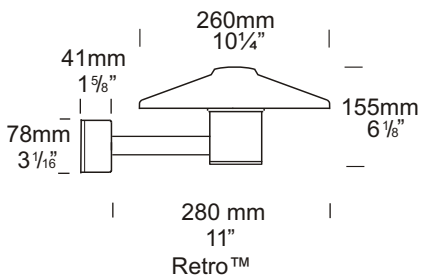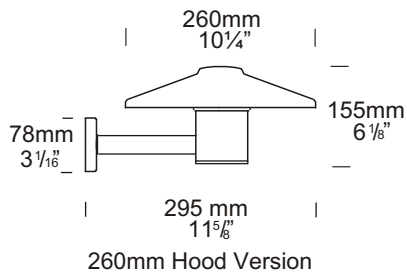

## Ordering Information

Luminaire Type	Material/Finish	Accessories
TLWM - Tier Lite Wall Mount	BK - Black BZ - Bronze GN - Green STAR - Silver Star WH - White WB - Birch DG - Dark Grey OG - Olive Green RG - Beige PR - Primrose COP - Copper SS - 316 Stainless Steel	CJK150 - Cable Joint Kit LENSSTEPF - Frosted Lens Option FL - Fluorescent Option /R - Retro™ Transformer 110/240-12 volt WBAP - Wall Box Adaptor Plate G9 - G9 option  For LED options, refer to page 10.4.1 (G4 JC LED), 10.4.6 (Wafer LED) or <a href="http://hunza.co.nz/l.html">http://hunza.co.nz/l.html</a>

Ordering Example: TLWM COP - Tier Lite Wall Mount in Copper  
 TLWM/R COP - Tier Lite Wall Mount Retro in Copper  
 TLWVG9 BK - Tier Lite Wall Mount G9 in Black

**HUNZA**™ PURE OUTDOOR LIGHTING

**HUNZA FACTORY**  
 130 Felton Mathew Ave  
 Glen Innes  
 Auckland 1072  
 New Zealand

Ph: 64-9-528 9471  
 Fax: 64-9-528 9361  
[hunza@hunza.co.nz](mailto:hunza@hunza.co.nz)  
[www.hunza.co.nz](http://www.hunza.co.nz)

**INTERNATIONAL CONTACTS:**  
[www.hunza.co.nz/contacts.php](http://www.hunza.co.nz/contacts.php)

Specifications may change without notice.  
 Manufactured in New Zealand.  
 © 2011 Hunza Holdings Ltd.

Ver 1.4

## Luminaire Construction

CNC machined from one of the following metals:

**Body:** High corrosion resist 63.5mm (2½") x 10mm (25/64") aluminium. End cap - solid aluminium 63.5mm (2½") rod.

**Base & Mounting Plate (Retro™):** Cast from virgin high corrosion resistant CC401 low copper aluminium alloy chromate substrate and high UV resistant polyester powder coat - Black, Bronze, Green, Silver Star, White, Birch, Dark Green, Olive Green, Beige, Primrose.

**Body:** Copper 63.5mm (2½") x 10mm (25/64). End cap - solid copper 63.5mm (2½") rod.

**Base:** Copper Hand spun 2mm (5/64")  
**Mounting Plate:** Forged brass (Retro™)

**Body:** 316 Stainless Steel 63.5mm (2½") x 10mm (25/64) rod. End cap - 316 stainless steel 63.5mm (2½") rod.

**Base:** Investment cast and CNC machined (Retro™).

**Mounting Plate:** Investment cast and CNC machined.

**Hood:** 260mm (10¼") x 1.2mm (1/16") hand spun aluminium, copper or 316 satinless steel. Note: The underside of copper and aluminium hoods have a white coating to maximise light reflection.

### Mounting

12 volt: the luminaire is mounted to the wall using two 316 stainless screws through a shallow base 16mm (5/8") in depth. A Wall Box Adaptor Plate is available as an accessory to fit 3.0 and 4.0 junction boxes for USA/Canada.

Retro™: 110/240-12 volt: a mounting plate is fixed to the wall using two screws, the luminaire is fitted to the mounting plate.

## Features

Lens:

UV stable polycarbonate.

Anti Glare Hood:

Diameter 260mm (10¼"). No upward light or glare projected.

Gaskets:

Silicone, iron impregnated 220°C (428°F).

Lamp Holders:

G4 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) teflon cables.

Fluorescent

E27 PET 210°C (410°F) base mount.  
E26 Available for USA/Canada.

G9 - 280°C (536°F) ceramic lamp holder with 250°C (480°F) teflon cables.

Accessories:

Cable Joint Kit (Cat. CJK150).

Not approved for USA/Canada.

Frosted Lens (Cat. LENSSTEPF).

Fluorescent Option 8 watt 240 volt only (Cat. FL).

Retro™ transformer 110/240-12 volt (Cat. /R).

Wall Box Adaptor Plate USA/Canada (Cat. WBAP 12 volt luminaire).

G9 Option (Cat. G9).

## Standards

IP66



UL1838

### Luminaire Weight

12 volt Alum 0.950kg (2lb 1oz)  
Cop 2.200kg (4lb 14oz)  
SS 1.900kg (4lb 3oz)  
Retro™ Alum 1.200kg (2lb 10oz)  
Cop 2.600kg (5lb 12oz)  
SS 2.300kg (5lb 1oz)

### Power Supply

HUNZA™ Wall Mount Transformer:  
not included.

RETRO™ IP66

HUNZA™ 110/240-12 volt ac silicone encapsulated electronic transformer is built into the base. Dimmable with a suitable Dimmer.

USA and Canada:

HUNZA™ Wall Mount Transformer:  
not included.

### Luminaire: supplied with

G4 Bi-Pin 5, 10, 20 watt lamp max.

Retro™ G4 Bi-Pin 10, 20 watt lamp max.

Fluorescent

E27 - 110/240 volt self ballasted lamp.

G9 - 25 watt lamp max.

**LED** - Refer to previous page.

USA and Canada:

G4 Bi-Pin 5, 10, 20 watt lamp max.

G9 - 25 watt lamp max.

**LED** - Refer to previous page.

**HUNZA™** PURE  
OUTDOOR  
LIGHTING

**HUNZA FACTORY**  
130 Felton Mathew Ave  
Glen Innes  
Auckland 1072  
New Zealand

Ph: 64-9-528 9471  
Fax: 64-9-528 9361  
hunza@hunza.co.nz  
www.hunza.co.nz

**INTERNATIONAL CONTACTS:**  
www.hunza.co.nz/contacts.php

Specifications may change without notice.  
Manufactured in New Zealand.  
© 2011 Hunza Holdings Ltd.

Ver 1.4