

Luminaire Construction

CNC machined from one of the following metals:

High corrosion resistant 63.5mm (2 1/2") x 10mm (25/64") aluminium.
End cap - solid aluminium 63.5mm (2 1/2") rod, with chromate substrate and high UV resistant polyester powder coat

Colours Black, Bronze, Green, White

Copper 63.5mm (2 1/2") x 10mm (13/32"). End cap - solid copper 63.5mm (2 1/2") rod.

316 Stainless Steel 63.5mm x 9mm (1 1/32"). End cap - solid 316 stainless steel 63.5mm (2 1/2") rod.

Mounting Dome Produced from glass-filled polypropylene.

Mounting

The Tree Mount dome is secured to the tree with 3 x 95mm (3 3/4") 316 stainless steel bolts. The Tree Mount Rubber strap version is secured to the tree with a one metre adjustable rubber strap.

Features

Lens:

10mm (3/8") flush clear tempered shatter resistant glass.

Life Time Warranty

Gasket:

Silicone, iron impregnated 220°C (428°F)

Lamp Holder:

GX10 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) teflon cables.

Accessories:

Cable Joint Kit (Cat. CJK150).

Frosted Lens (Cat. LENSSTEPF).

Swivel:

Aluminium and Copper luminaires 360° rotation and 0 - 90° elevation, solid brass with anti rust spring.

Stainless Steel luminaires - 360° rotation and 0 - 90° Elevation, full stainless steel construction.

Standards

AS/NZS 60598.2.2 IP66



UL 1598

Luminaire Weight

Alum 1.10kg (2lb 6oz)

Cop 3.00kg (6lb 8oz)

SS 2.34kg (5lb 3oz)

Power Supply


Ballast built in: 230 - 240 volt ac 50Hz.

USA and Canada:


Ballast built in: 120 volt ac 60Hz.

Luminaire: supplied with MR16 GX10 20 or 35 watt lamp.


CMH20W MR16 SP Candela Power Distribution

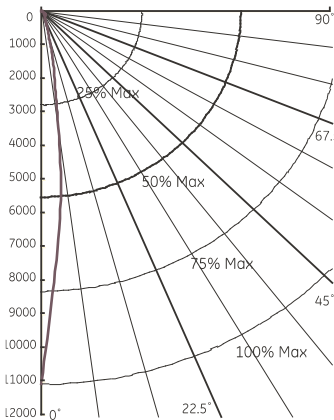


CMH20W MR16 FL Candela Power Distribution

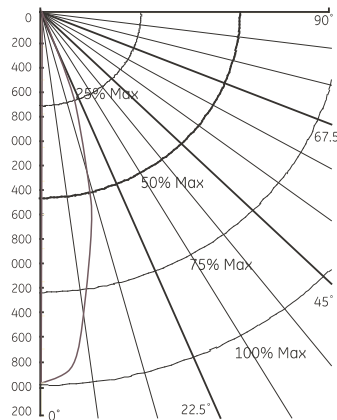


CMH20W MR16 WFL Candela Power Distribution

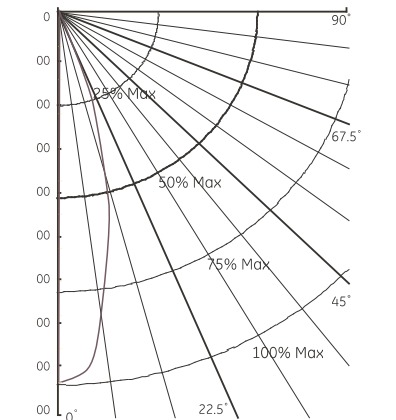


CMH 35 W/MR16/930/SP Candela Power Distribution

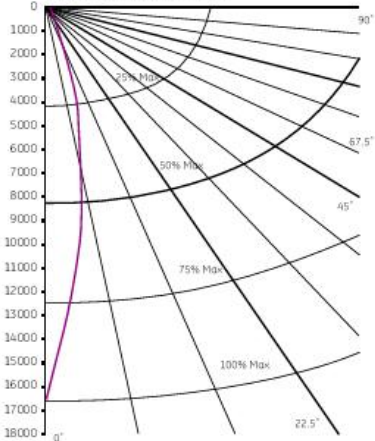

CMH 35 W/MR16/930/FL Candela Power Distribution

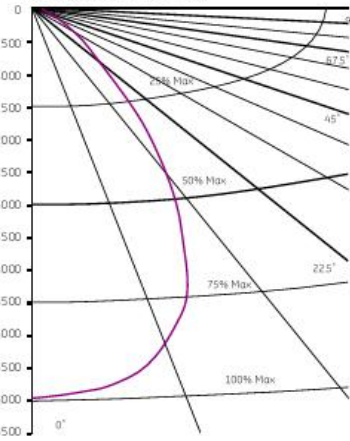

CMH 35 W/MR16/930/WFL Candela Power Distribution

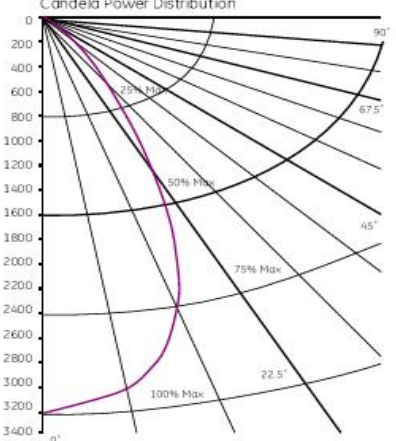

HUNZA™ PURE OUTDOOR LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Glen Innes
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunza.co.nz

INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without notice.
Manufactured in New Zealand.

© 2009 Hunza Holdings Ltd.

Ver 1.4