

Twig Lite

Cat. No. TG

Cat. No. TG/R


[Click here for specifications on this luminaire](#)

[Return to main index](#)



The Twig Lite has a subtle appearance, which allows it to blend into taller foliage. The luminaire has a frosted glass lens to reduce glare and is operated with a 5, 10 or 20 watt GU4 bi pin halogen lamp.

The Retro™, which is a mains option, avoids the need to bury a transformer. The 110/240-12 volt electronic transformer is built into the pole and is a double insulated safety isolating transformer. The transformer has an IP56 rating.

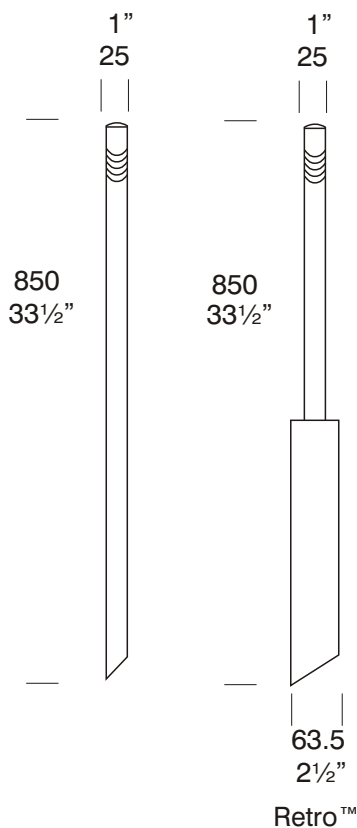

Ordering Information

Luminaire Type

Material

Accessories

TG - Twig Lite

Copper only

CJK150 - Cable Joint Kit
SSP/G - Hunza® Super Spike (Not Retro)
/R - Retro™ Transformer 1
110/240-12 volt

Ordering Example TG - Twig Lite in Copper

SSP/G - Hunza® Super Spike
(Accessories ordered separately)



FACTORY: Ph: 64-9-528 9471 Fax: 64-9-528 9361.

USA: Ph. 310 560 7310 Fax. 1 877 692 4589.

hunza@hunza.co.nz www.hunza.co.nz

Specifications may change without notice.

130 Felton Mathew Ave, Glen Innes, Auckland, New Zealand.

3237 Long Island St, W. Sacramento, California 95691, USA.

Manufactured in New Zealand.

© 2004 Hunza Holdings Ltd

Ver 1.2

Luminaire Construction
 CNC machined from copper only:
 Pole - copper 25.4mm (1") x 850mm (33½") tube.
 End cap - solid copper 25.4mm (1") rod.
 Retro™:
 Pole - copper 25.4mm (1") x 410mm (16") tube.
 Transformer Pole 63.5mm (2½") x 440mm (17½").

Mounting
 Pole 850mm (33½") directly mounted into the earth or for extra stability in sand or loose ground use a Hunza® Super Spike. Retro™ set in concrete.



Features
Lens:
 22mm (¾") frosted glass tube.
Gaskets:
 Nytrol 150° (302°f)
Lamp Holder:
 GU4 - 350°c (662°f) ceramic multi contact lamp holder with 250°c (480°f) teflon cables.
Accessories:
 Cable Joint Kit (Cat. CJK 150) Not approved for USA /Canada.
 Hunza® Super Spike - (Cat. SSP/G). Not for Retro™.
 Retro™ transformer 110/240-12 volt (Cat. /R) IP56.

Standards
 IP44  UL1838



Luminaire Weight
 12 volt .800kg (1lb 12oz)
 Retro™ 1.98kg (4lb 5oz)

Power Supply
 HUNZA® Inground or Wall Mount Transformer: not included.
RETRO™
 HUNZA® 110/240-12 volt ac silicone encapsulated electronic transformer built into the pole, IP56. Dimmable with a suitable dimmer.
 * Note see page 7.3 for details.
USA and Canada:
 HUNZA® Wall Mount Transformer: not included.
Luminaire: supplied with
 GU4 Bi-Pin 5, 10, 20 watt lamp max.
 Retro™ GU4 Bi-Pin 10, 20 watt max.
USA and Canada:
 GU4 Bi-Pin 5, 10 watt lamp max.

Twig Lite GU4 10 watt Bi-Pin lamp - Lens height 700mm (27½")

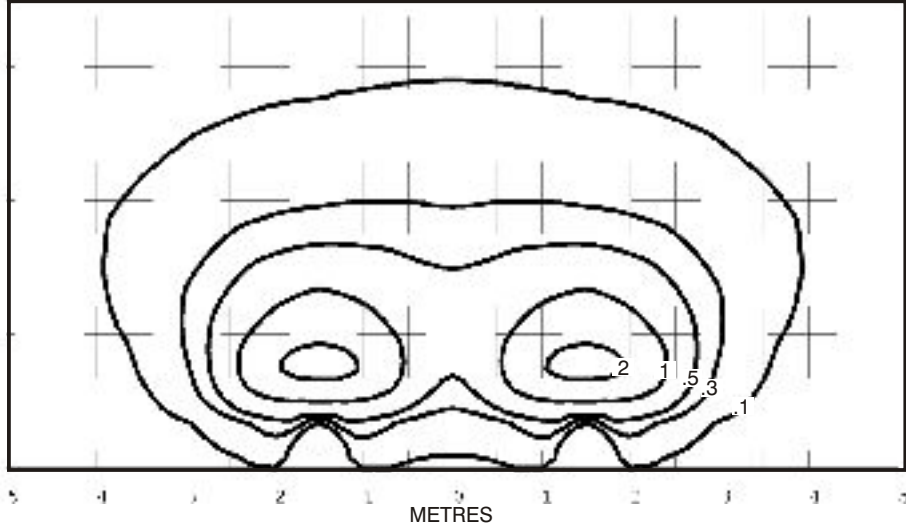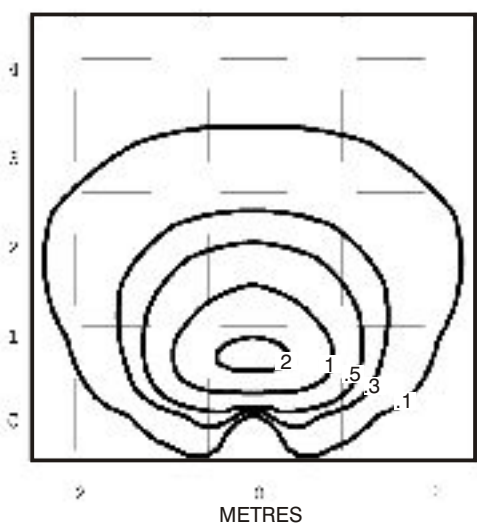

Twig Lite GU4 20 watt Bi-Pin lamp - Lens height 700mm (27½")

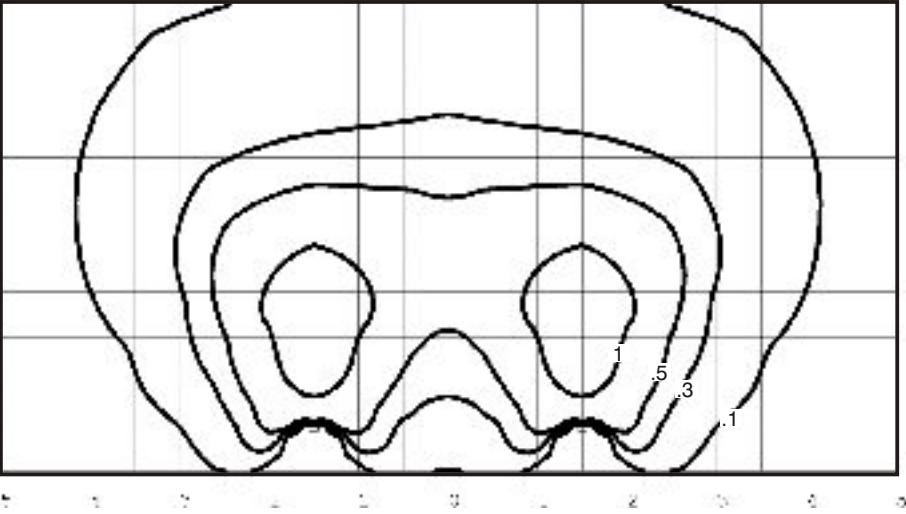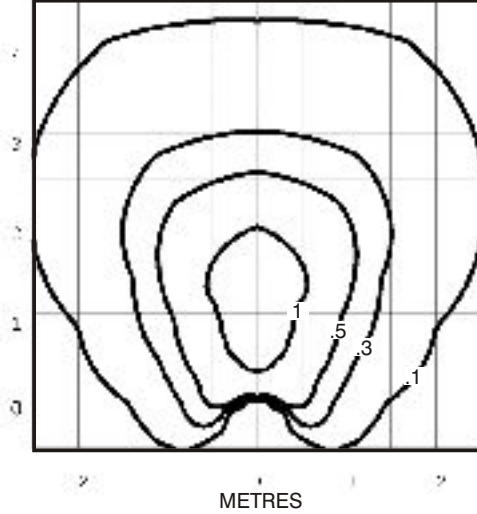

Isolux Lumens Plot - Footcandles = Isolux figures divided by 10.76



FACTORY: Ph: 64-9-528 9471 Fax: 64-9-528 9361.
USA: Ph. 310 560 7310 Fax. 1 877 692 4589.
 hunza@hunza.co.nz www.hunza.co.nz
 Specifications may change without notice.

130 Felton Mathew Ave, Glen Innes, Auckland, New Zealand.
 3237 Long Island St, W. Sacramento, California 95691, USA.
 Manufactured in New Zealand.
 Ver 1.2 © 2004 Hunza Holdings Ltd