

Twin Bar Lite

Cat. No. TBL


[Click here for specifications on this luminaire](#)

[Return to main index](#)



Two individual spot lites which can be aimed in two entirely different directions. Each lite has fully adjustable arms allowing 360 degree rotation and 0 - 90 degree elevation adjustment.

The heads are mounted on a 250mm (10") bar with twin ground spikes.

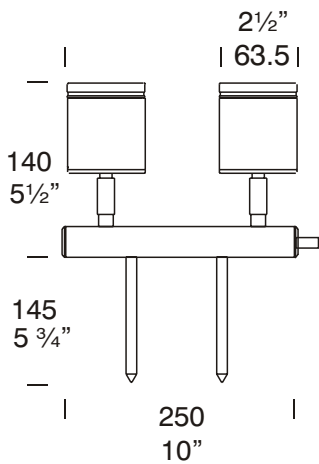

Ordering Information

Luminaire Type

TBL - Twin Bar Lite

Material/Finish

BK - Black
BZ - Bronze
GN - Green
MS - Metallic Silver

COP - Copper
SS - 316 Stainless Steel

Accessories

CJK150 - Cable Joint Kit
DFL - Frosted Lens
GG - Glare Guard
HCL - Hex Cell Louvre Adaptor
LED - LED Array
D/LED - LED Driver
/300 - 300 (12") Spike

Ordering Example TBL COP - Twin Bar Lite in Copper
TBL /300 BZ - Twin Bar Lite in Bronze with 300mm (12") Spike
HCL BK - Hex Cell Louvre Adaptor in Black
(Accessories ordered separately)



Patent Pending



FACTORY: Ph: 64-9-528 9471 Fax: 64-9-528 9361.

USA: Ph. 310 560 7310 Fax. 1 877 692 4589.

hunza@hunza.co.nz www.hunza.co.nz

Specifications may change without notice.

130 Felton Mathew Ave, Glen Innes, Auckland, New Zealand.

3237 Long Island St, W. Sacramento, California 95691, USA.

Manufactured in New Zealand.

© 2004 Hunza Holdings Ltd

Ver 1.2

Luminaire Construction

CNC machined from one of the following metals:

High corrosion resistant 63.5mm (2½") x 10mm (25/64") aluminium.
End cap - solid aluminium 63.5mm (2½") rod, with chromate substrate and high UV resistant polyester powder coat -

Colours Black, Bronze, Green, Metallic Silver.

Copper 63.5mm (2½") x 10mm (13/32"). End cap - solid copper 63.5mm (2½") rod.

Stainless steel 316 9mm (11/32"). End cap - solid 316 stainless steel 63.5mm (2½") rod.

Mounting

Spike 150mm (6") 300mm (12") mounted directly into the ground.

Features

Lens:

3mm (1/8") clear tempered shatter resistant glass. Life Time Warranty.

Gaskets:

Silicone, iron impregnated 220°C (428°F).

Lamp Holders:

GU5.3 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) teflon cables.

Accessories:

Cable Joint Kit (Cat.CJK150).
Not approved for USA /Canada.Frosted Lens (Cat. DFL).
Glare Guard (Cat. GG).Hex Cell Louvre Adaptor (Cat. HCL).
LED Array Red, Blue, White, Yellow, Green (Cat. LED). Refer sheet 8.4
LED Driver (Cat. D/LED) Refer sheet no. 8.4
Ground Spike 300mm (12") (Cat. /300).

Swivels :

Aluminium and Copper luminaires - 360° rotation and 0 - 90° elevation, solid brass with anti rust spring.

Stainless Steel luminaires - 360° rotation and 0 - 90° elevation, full stainless steel construction.

Standards

IP66



UL1838

Luminaire Weight

Alum 1.060 kg (2lb 5oz)
Cop 2.840 kg (6lb 4oz)
SS 2.420kg (5lb 5oz)

Power Supply

HUNZA® Inground or Wall Mount Transformer: not included.

LED - Refer sheet no. 8.4

USA and Canada:

HUNZA® Wall Mount Transformer: not included.

LED - Refer sheet no. 8.4

Luminaire: supplied with

MR16 GU5.3 - 2 x 20, 35 or 50 watt lamps max.










LED - Refer sheet no. 8.4

USA and Canada:

MR16 GU5.3 - 2 x 20 watt lamps.

When glare guard fitted lamp wattage can be increased to 35 watt.

LED - Refer sheet no. 8.4

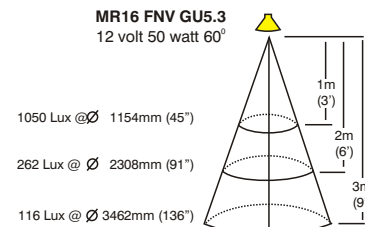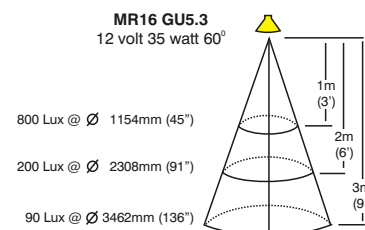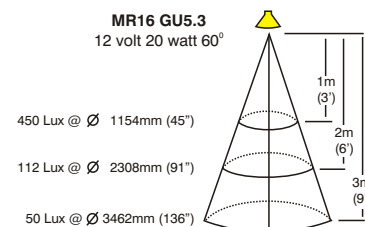

FACTORY: Ph: 64-9-528 9471 Fax: 64-9-528 9361.

USA: Ph. 310 560 7310 Fax. 1 877 692 4589.

hunza@hunza.co.nz www.hunza.co.nz

Specifications may change without notice.

130 Felton Mathew Ave, Glen Innes, Auckland, New Zealand.

3237 Long Island St, W. Sacramento, California 95691, USA.

Manufactured in New Zealand.

Ver 1.2

© 2004 Hunza Holdings Ltd