

Wall Down Lite Metal Halide

Cat. No. DLMH20

Cat. No. DLMH35



The Wall Down Lite Metal Halide is a wall-mounted luminaire with a fixed head to give dramatic wash-lighting effects on walls - it can be directed either downwards or upwards. Water resistant with a 125mm diameter mounting base, complete with stainless steel screws.

Metal Halide lamps are highly energy efficient light sources using less energy and out putting 2 - 3 times the light of a halogen lamp. This luminaire uses a MR16 GX10 20 or 35 watt lamp.

This luminaire is machined from a choice of 10mm thick aluminium with a UV stable powder coated finish, solid copper or 316 stainless steel with a clear, tempered, flush glass lens and high temperature silicon gaskets.

Ordering Information

Luminaire Type


DLMH20 - Wall Spot Lite
Metal Halide 20watt
DLMH35 - Wall Down Lite
Metal Halide 35watt

Material/Finish

BK - Black
BZ - Bronze
GN - Green
STAR - Silver Star
WH - White
COP - Copper
SS - 316 Stainless Steel

Accessories

CJK150 - Cable Joint Kit
LENSSTEPF - Frosted Lens

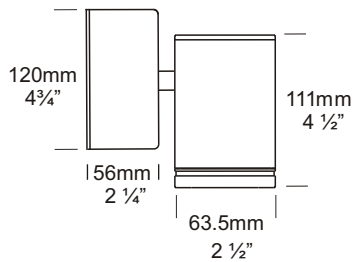

Ordering Example: DLMH20 BK - Wall Down Lite Metal Halide 20 watt
in Black

LENSSTEPF - Frosted Lens

(Accessories ordered separately)

HUNZATM PURE
OUTDOOR
LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Glen Innes
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunza.co.nz

INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without notice.
Manufactured in New Zealand.

© 2009 Hunza Holdings Ltd.

Ver 1.4

Luminaire Construction

CNC machined from the following metals:

Body: High corrosion resistant low copper 63.5mm (2½") x 10mm (25/64") aluminium. End cap - solid aluminium 63.5mm (2½") rod.

Base & Mounting Plate: Cast from virgin high corrosion resistant CC401 low copper aluminium alloy chromate substrate and high UV resistant polyester powder coat - Black, Bronze, Green, Silver Star, White.

Body: Copper 63.5mm (2½") x 10mm (25/64). End cap - solid copper 63.5mm (2½") rod.

Base: Copper hand spun 2mm (5/64")

Mounting Plate: Forged copper.

Body: 316 Stainless Steel 63.5mm (2½") x 10mm (25/64) rod. End cap - 316 stainless steel 63.5mm (2½") rod.

Base: Investment cast and CNC machined.

Mounting Plate: Investment cast and CNC machined.

Mounting

A mounting plate is fixed to the wall using two screws and the luminaire is fitted to the mounting plate.

Features

Lens:

10mm (3/8") thick flush clear tempered shatter resistant glass.

Life Time Warranty.

Gasket: Silicone, iron impregnated 220°C (428°F).

Lamp Holder: GX10 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) teflon cables.

Accessories:

Cable Joint Kit (Cat CJK150).

Frosted Lens (Cat. LENSTEPF).

Swivels: Aluminium and Copper luminaires - 360° rotation and 0 - 90° elevation, solid brass with anti rust spring.

Stainless Steel luminaires - 360° rotation and 0 - 90° elevation, full stainless steel construction.

Standards

IP66 AS/NZS60598.2.2



UL1598

Luminaire Weight

Alum .900kg (1lb 15oz)

Cop 1.710kg (3lb 12oz)

SS 1.500kg (3lb 3oz)

Power Supply


Ballast built in: 230 - 240 volt ac 50Hz.

USA and Canada:


Ballast built in: 120 volt ac 60Hz.

Luminaire: supplied with MR16 GX10 20 or 35 watt lamp


CMH20W MR16 SP Candela Power Distribution

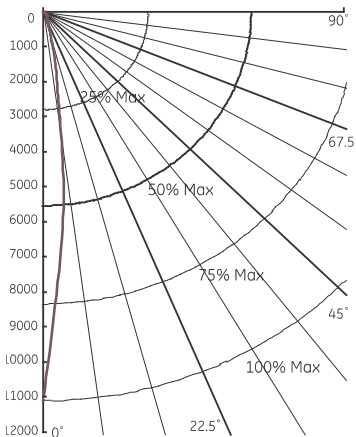


CMH20W MR16 FL Candela Power Distribution

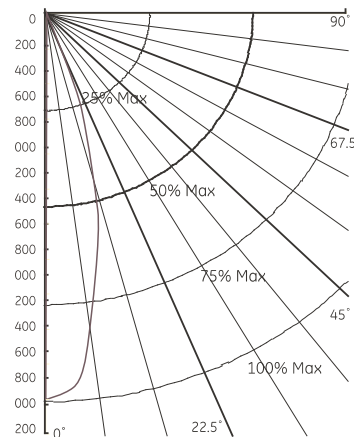


CMH20W MR16 WFL Candela Power Distribution

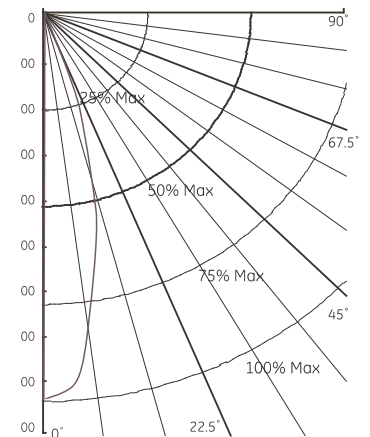


CMH 35 W/MR16/930/SP Candela Power Distribution

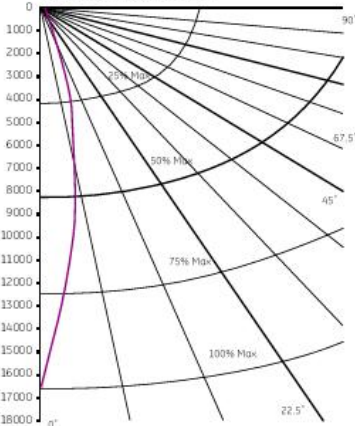

CMH 35 W/MR16/930/FL Candela Power Distribution

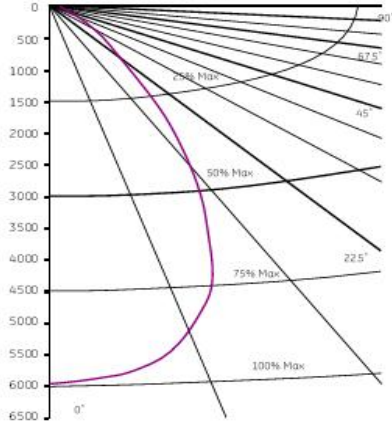

CMH 35 W/MR16/930/WFL Candela Power Distribution

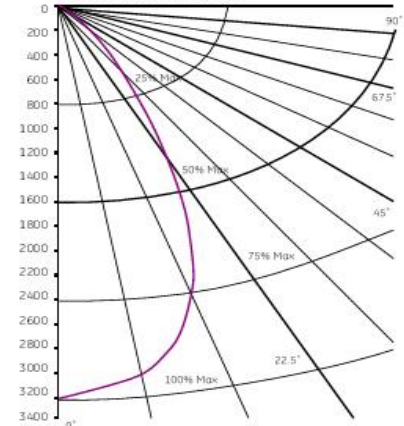

HUNZA™ PURE OUTDOOR LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Glen Innes
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunza.co.nz

INTERNATIONAL CONTACTS:
www.hunza.co.nz/contacts.php

Specifications may change without notice.
Manufactured in New Zealand.
© 2009 Hunza Holdings Ltd.

Ver 1.4