


# Mouse Lite™

Cat. No. MOUSE

Cat. No. MOUSEss

[Click here for specifications on this luminaire](#)

[Return to main index](#)

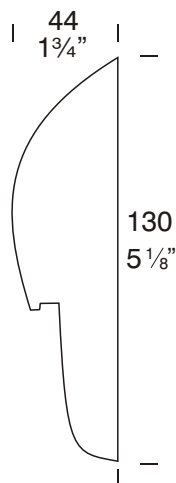

The Mouse Lite™ is a solid bronze or solid 316 stainless steel luminaire for surface mounting. The shape is pleasing to the eye and blends unobtrusively into any situation. A space in the wall behind the luminaire is not required for cable connection due to the design which includes a cable junction cavity. There is no light directed upward or forward into the eye.

## Ordering Information

### Luminaire Type

MOUSE - MouseLite

### Material

BZ - Bronze  
SS - 316 Stainless Steel

### Accessories

CJK150 - Cable Joint Kit  
LED - LED Array

Ordering Example MOUSE SS - Mouse Lite in 316Stainless Steel

CJK150 - Cable Joint Kit

*(Accessories ordered separately)*



**FACTORY:** Ph: 64-9-528 9471 Fax: 64-9-528 9361.

**USA:** Ph. 310 560 7310 Fax. 1 877 692 4589.

hunza@hunza.co.nz www.hunza.co.nz

Specifications may change without notice.

130 Felton Mathew Ave, Glen Innes, Auckland, New Zealand.

3237 Long Island St, W. Sacramento, California 95691, USA.

Manufactured in New Zealand.

© 2004 Hunza Holdings Ltd

Ver 1.2

### Luminaire Construction

CNC finished machined from one of the following metals:

Investment cast in bronze with forged brass mounting plate.

Investment cast in 316 stainless steel with investment cast 316 stainless steel mounting plate.

### Mounting

Mount using a mounting plate fixed to the wall, etc. with 316 stainless screws. The luminaire is then fitted to the back plate using two pan head screws.

### Features

#### Lens:

2mm (3/32") frosted tempered shatter resistant glass.

Life Time Warranty.

#### Gasket:

Nytrol 150<sup>o</sup>c (302<sup>o</sup>f).

#### Lamp Holder:

GU4 - 350<sup>o</sup>c (662<sup>o</sup>f) ceramic multi contact lamp holder with 180<sup>o</sup>c (356<sup>o</sup>f) silicone cables.


#### Accessories:

Cable Joint Kit (Cat. CJK 50)  
Not approved for USA /Canada.

LED Array Red, Blue, White, Yellow, Green (Cat. LED). Refer sheet 8.4

Retro™ transformer 110/240-12 volt (Cat. /R).

### Standards

IP66  UL1838

### Luminaire Weight

BZ .820kg (1lb 12oz)  
SS .750kg (1lb 10oz)

### Power Supply

HUNZA® Inground or Wall Mount  
Transformer: not included.

**LED** - Refer sheet no. 8.4

### USA and Canada:

HUNZA® Wall Mount Transformer: not included.

**LED** - Refer sheet no. 8.4



### Luminaire: supplied with

GU4 5, 10, 20 watt lamp max  
LED - Refer sheet no. 8.4



### USA and Canada:

GU4 5, 10 watt lamp max.  
LED - Refer sheet no. 8.4

Mouse Lite 10 watt G4 Bi-Pin lamp - Lens height 400mm (15¾")

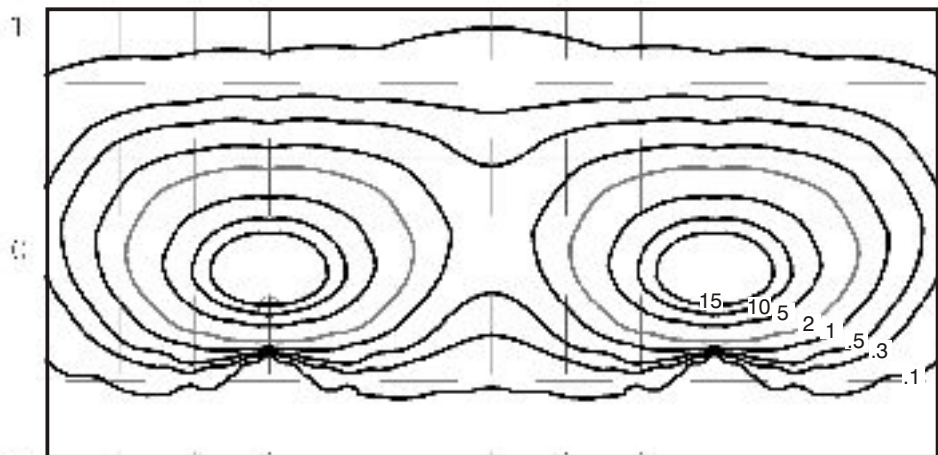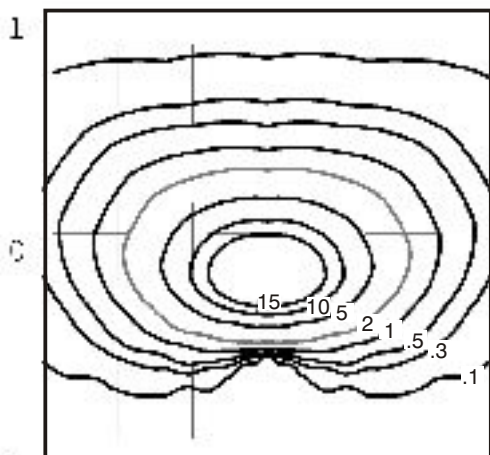

Mouse Lite 20 watt G4 Bi-Pin lamp - Lens height 400mm (15¾")

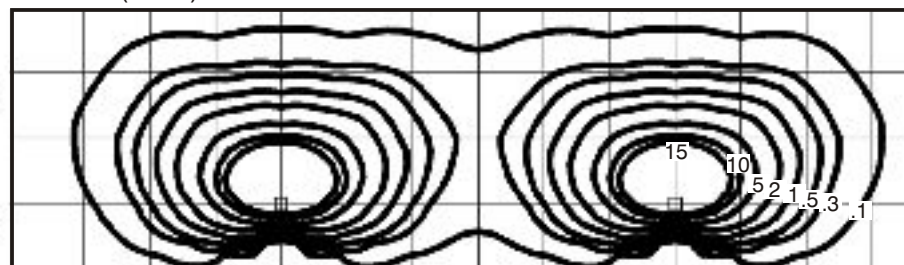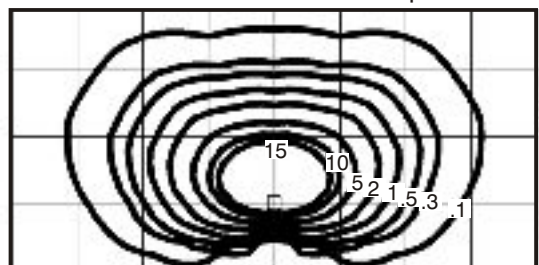

Isolux Lumens Plot - Footcandles = Isolux figures divided by 10.76



**FACTORY:** Ph: 64-9-528 9471 Fax: 64-9-528 9361.

**USA:** Ph. 310 560 7310 Fax. 1 877 692 4589.

hunza@hunza.co.nz www.hunza.co.nz

Specifications may change without notice.

130 Felton Mathew Ave, Glen Innes, Auckland, New Zealand.

3237 Long Island St, W. Sacramento, California 95691, USA.

Manufactured in New Zealand.

Ver 1.2

© 2004 Hunza Holdings Ltd