


# Euro Spot

Cat. No. ES

Cat. No. ESS

[Click here for specifications on this luminaire](#)

[Return to main index](#)

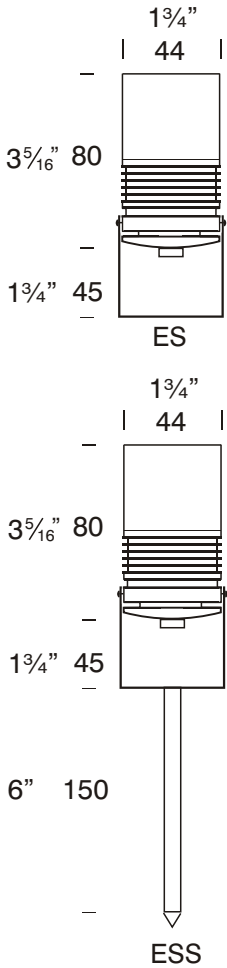

The Euro Spot is for situations where the luminaire needs to be concealed, the smaller sized MR11 lamp is utilised to achieve. It has a built in glare guard.

## Ordering Information

### Luminaire Type

ES - Euro Spot

### Material

COP - Copper  
SS - 316 Stainless Steel

### Accessories

CJK150 - Cable Joint Kit  
EFL - Frosted Lens  
S - 150mm (6") Spike  
LED - LED Array

Ordering Example

ES COP - Euro Spot in Copper

ESS SS - Euro Spot in 316 Stainless with  
Steel 150mm (6") Spike

EFL - Frost Lens

*(Accessories ordered separately)*



**FACTORY:** Ph: 64-9-528 9471 Fax: 64-9-528 9361.

**USA:** Ph. 310 560 7310 Fax. 1 877 692 4589.

hunza@hunza.co.nz www.hunza.co.nz

Specifications may change without notice.

130 Felton Mathew Ave, Glen Innes, Auckland, New Zealand.

3237 Long Island St, W. Sacramento, California 95691, USA.

Manufactured in New Zealand.

Ver 1.2

© 2004 Hunza Holdings Ltd

### Luminaire Construction

CNC machined from one of the following metals:

Body:

Copper 45.4mm (13/4") rod.

"U" Bracket:

12 x 3mm (1/2" x 1/8") copper.

Spike:

11mm x 150mm (3/8" x 6") copper.

Body:

Stainless steel 316 45.4mm (13/4") rod.

"U" Bracket:

12 x 3mm (1/2" x 1/8") Stainless steel 316.

Spike:

11mm x 150mm (3/8" x 6") Stainless steel 316.

### Mounting

ES:

Via a "U" bracket that is screwed to the mounting surface.

ESS:

Ground spike 150mm (6") or 300mm (12") mounted directly into the ground.

### Features

**Lens:**

3mm (1/8") clear tempered shatter resistant glass with Hex Cell Louver for glare control.

Life Time Warranty.

**Gaskets:**

Silicone, iron impregnated 220°C (428°F).

**Lamp Holders:**

GU4 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) teflon cables.

**Accessories:**

Cable Joint Kit (Cat. CJK150). Not approved for USA/Canada.

Frosted Lens (Cat. EFL).

Ground Spike 300mm (12")

(Cat. /300).

LED Array Red, Blue, White, Yellow, Green (Cat. LED). Refer sheet 8.4

**Swivels:**

Copper luminaires - 360° rotation and 0 - 90° elevation, solid brass with anti rust spring.

Stainless Steel luminaires - 360° rotation and 0 - 90° elevation, full stainless steel construction.

### Standards

**IP66**



**UL1838**

### Luminaire Weight

Cop 2.840kg (6lb 4oz)  
SS 2.414kg (5lb 5oz)

### Power Supply

HUNZA® Inground or Wall Mount Transformer: not included.

**LED** - Refer sheet no. 8.4

### USA and Canada

HUNZA® Wall Mount Transformer: not included.

**LED** - Refer sheet no. 8.4

### Lamp Type



MR11 GU4 - 1 x 20 watt lamps max.

**LED** - Refer sheet no. 8.4

### USA and Canada

MR11 GU4 - 1 x 10 watt lamps max.

**LED** - Refer sheet no. 8.4

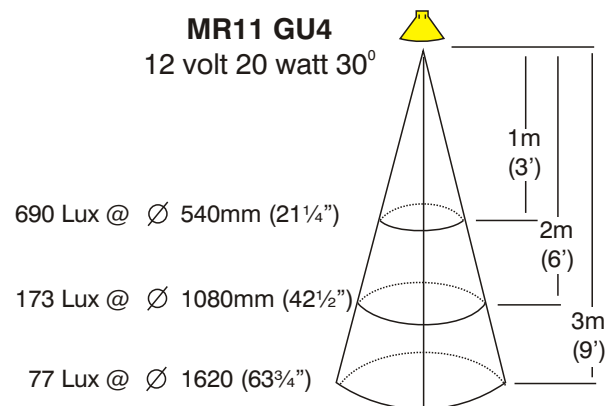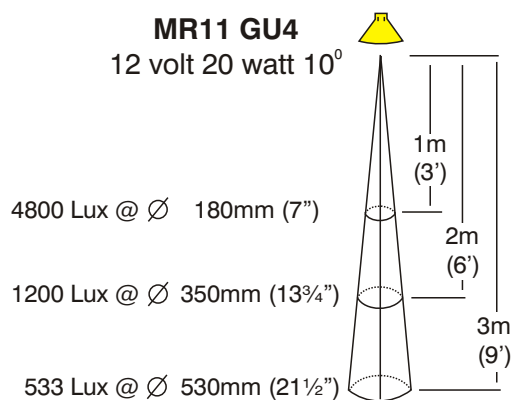

**FACTORY:** Ph: 64-9-528 9471 Fax: 64-9-528 9361.

**USA:** Ph. 310 560 7310 Fax. 1 877 692 4589.

hunza@hunza.co.nz www.hunza.co.nz

Specifications may change without notice.

130 Felton Mathew Ave, Glen Innes, Auckland, New Zealand.

3237 Long Island St, W. Sacramento, California 95691, USA.

Manufactured in New Zealand.

Ver 1.2

© 2004 Hunza Holdings Ltd